

The logo for Krube, featuring the word "krube" in a bold, lowercase, sans-serif font. The letter "k" is black, and the "r" has a small orange accent. The "u" and "b" are black, and the "e" has a small orange accent. The logo is enclosed in a white circle with a blue border.

krube

规格书


SPECIFICATION

MODEL
K-DC20-24BL

NOTES

技术要求



1. 产品标定电压DC26V, 运行电压DC20-32V;
2. 产品符合FMVSS302阻燃规格.
3. 电机IP68防护;
4. 产品工作环境温度: -40 到+85 C;
5. 未注尺寸公差执行GB/T 14486 MT5a;
6. 性能曲线供参考:

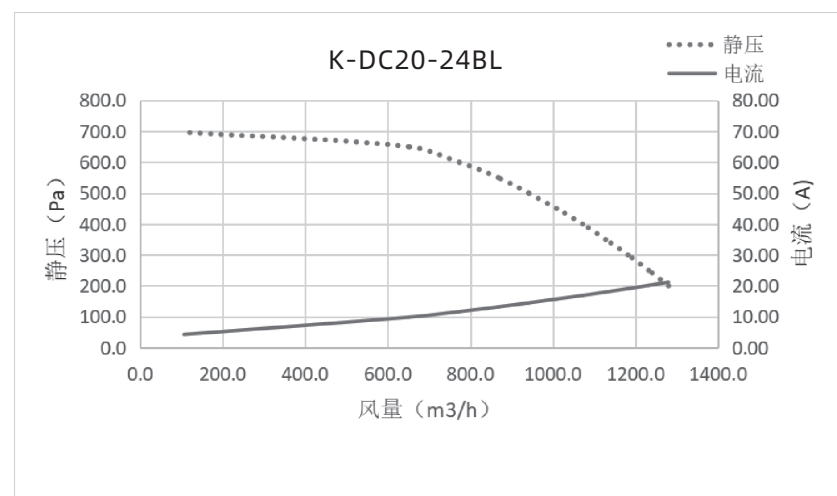

BRUSHLESS MOTOR CONNECTOR	
DEIPHI MALE SEALED MIXED CONNECTOR	
CONNECTOR	12052200
TPA	12052199
CPA	12020833
20AWG TERMINAL	12077628
12AWG TERMINAL	12065197
20AWG SEAL	12052924
12AWG SEAL	15324989

接插件信息

CONNECTOR INFORMATION

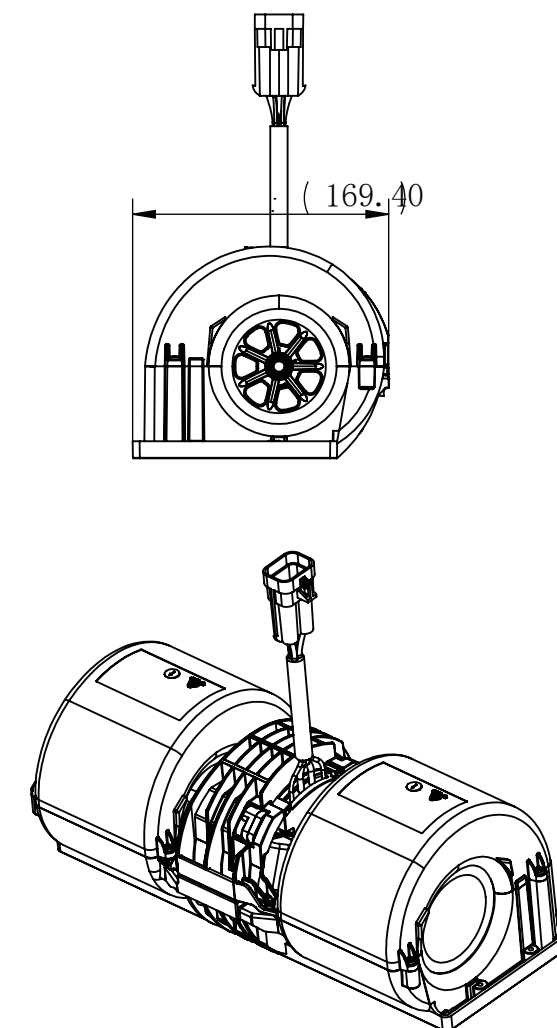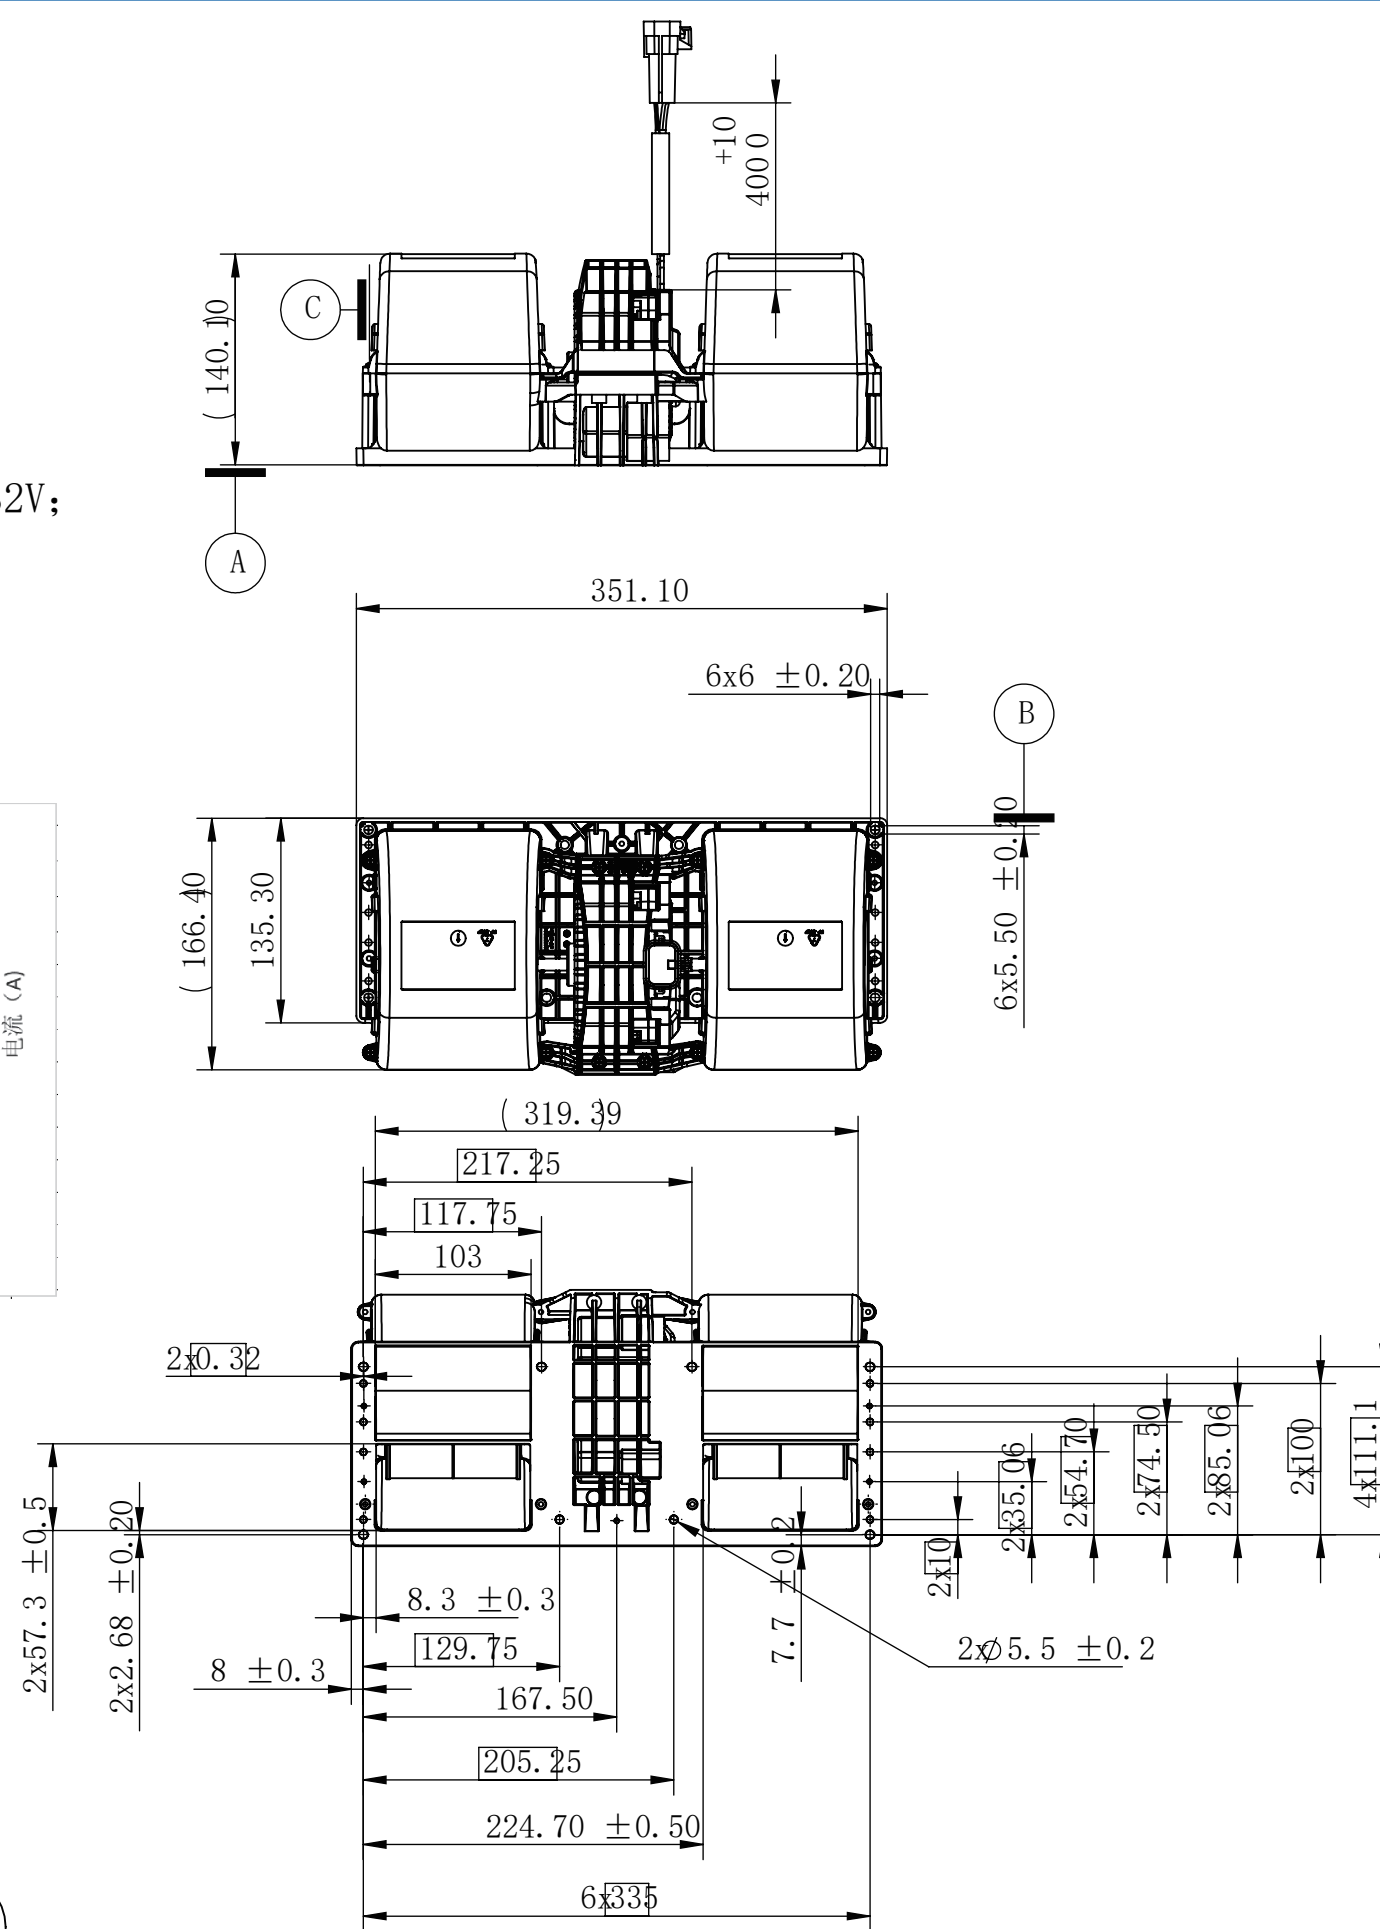

VOL- SAE J1128 GXL 12# AWG BLACK (黑)

VOL+ SAE J1128 GXL 12# AWG RED (红)

ANALOG SAE J1128 GXL 20# AWG BLUE (蓝)

LIN SAE J1128 GXL 20# AWG WHITE (白)