



网罩 Grid (S)
K-AC450-S220-**




方形 Square (W)
K-AC450-W220-**









圆筒 Cylinder (Y)
K-AC450-Y220-**

曲线图 Graph

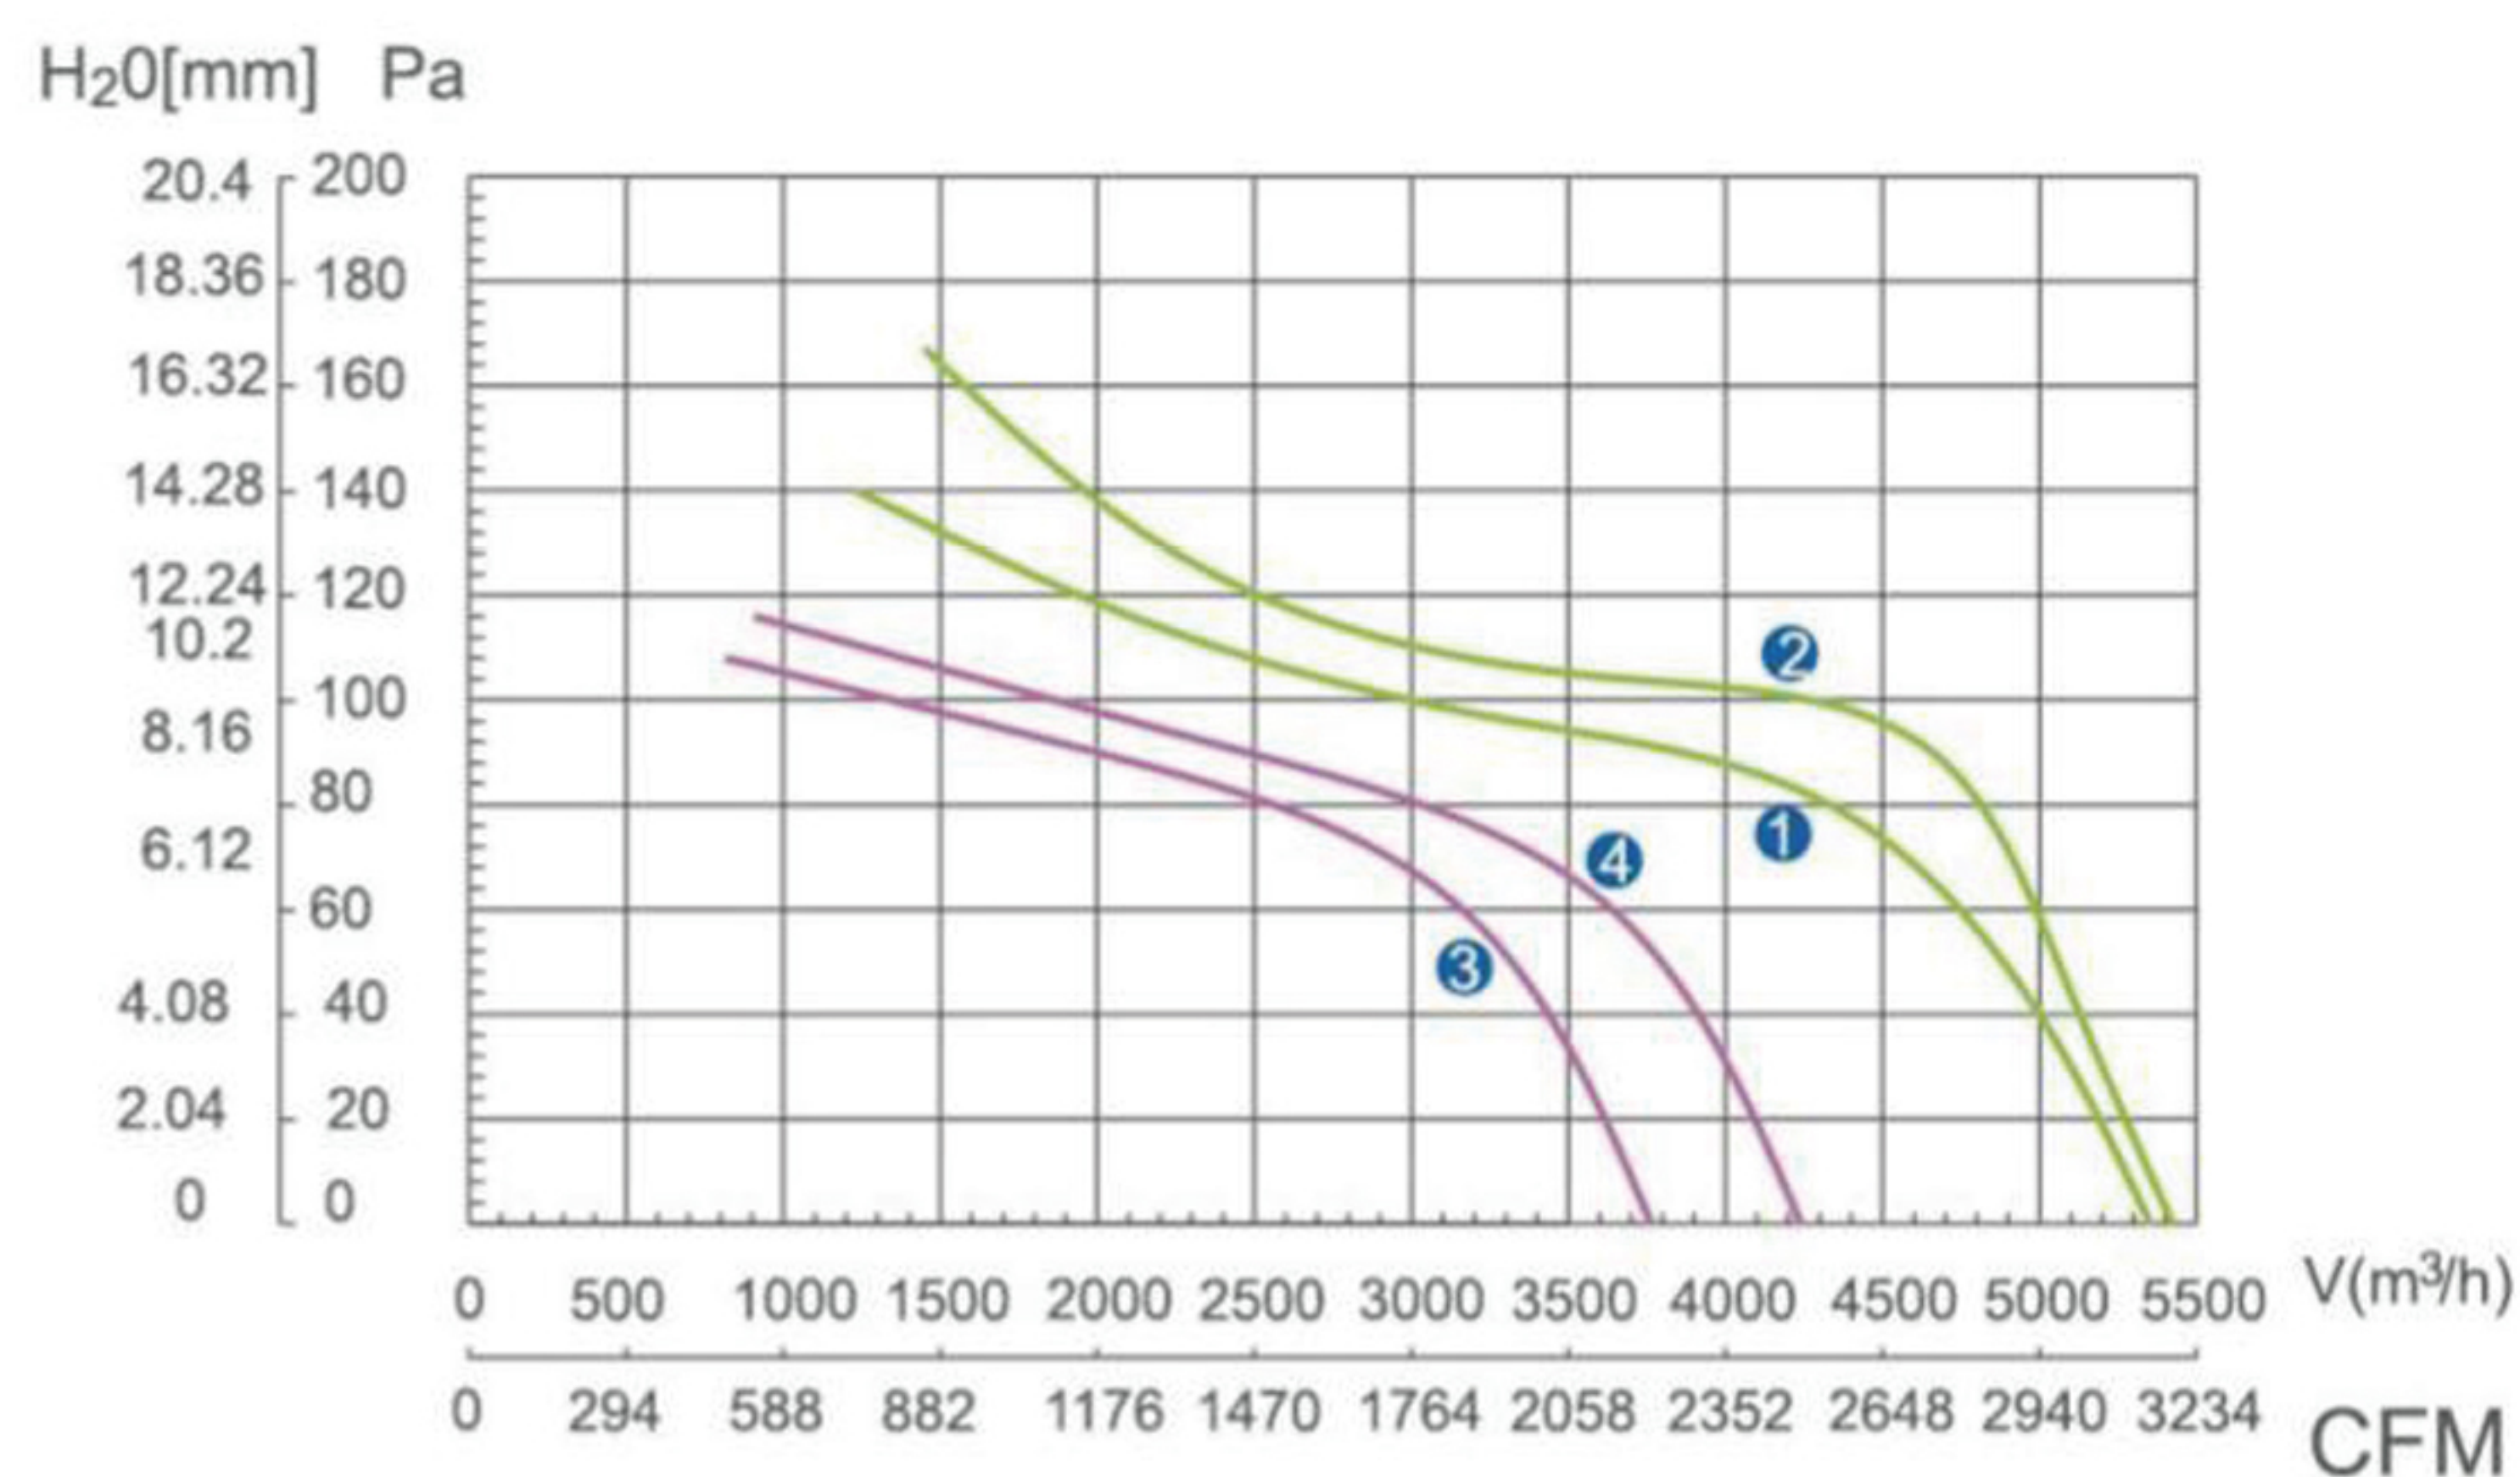

安装尺寸图 Mounting dimensions

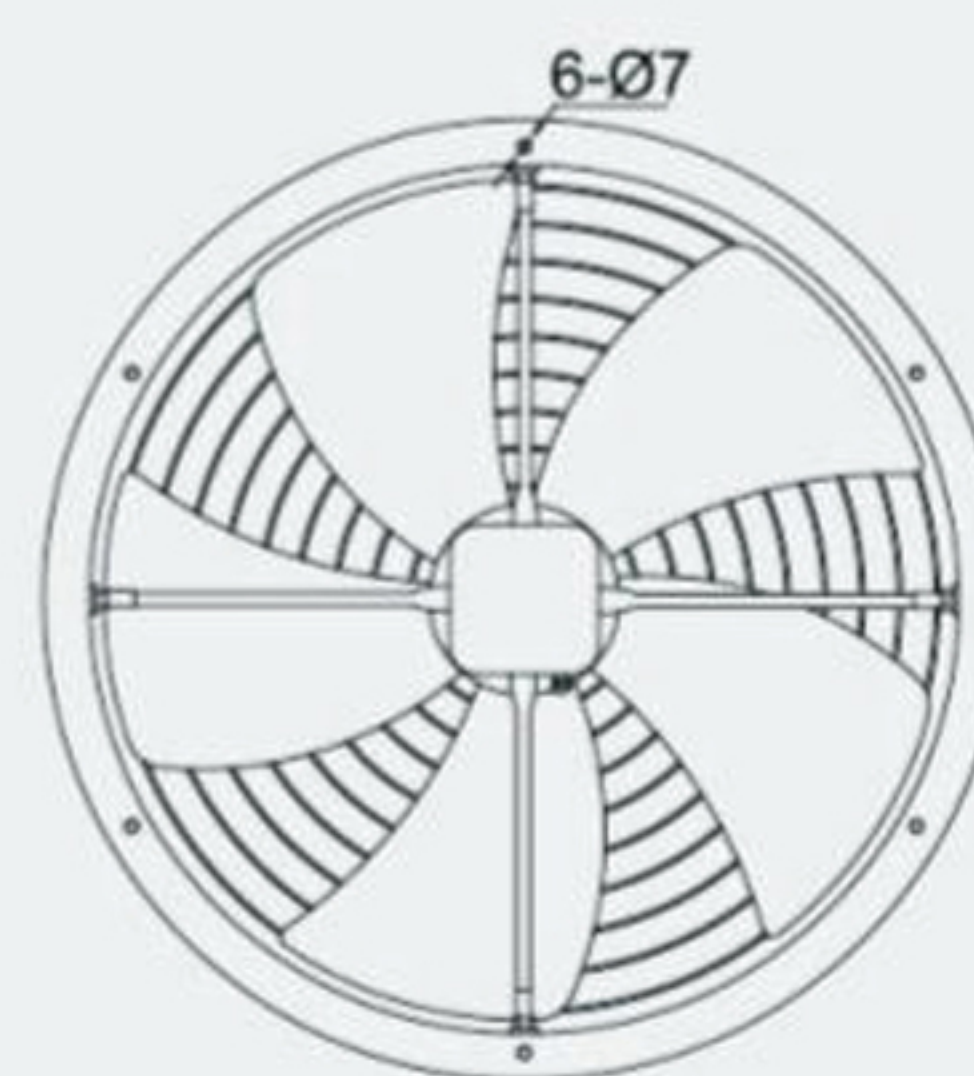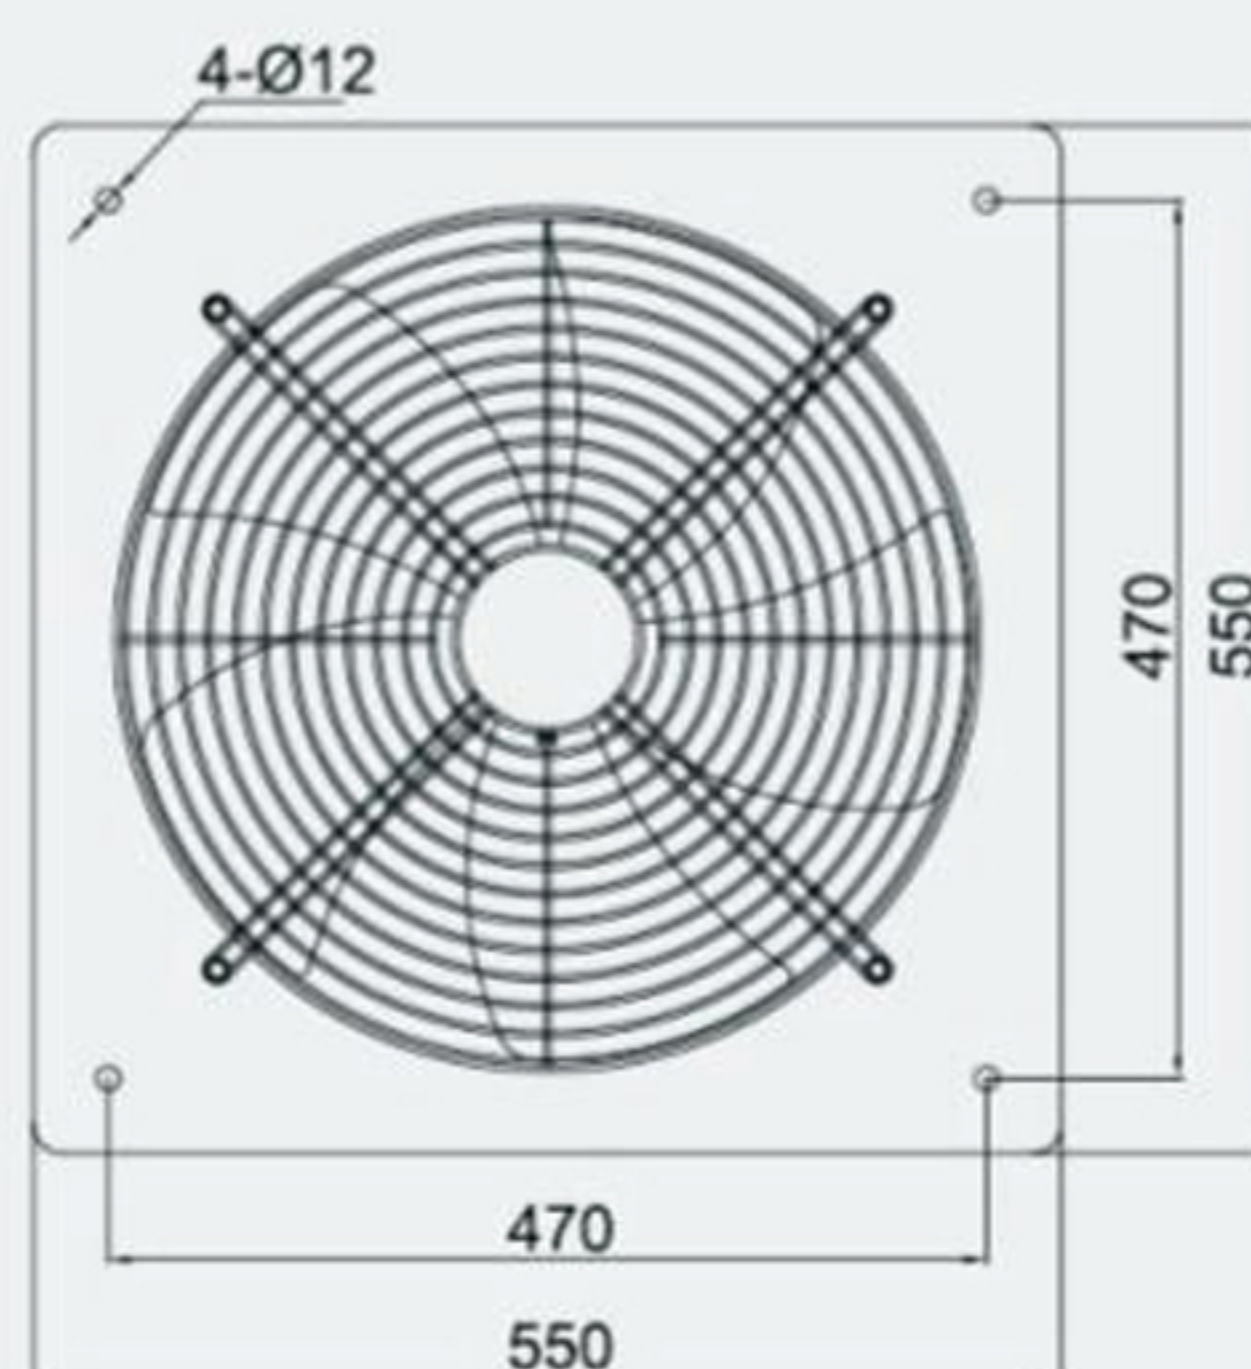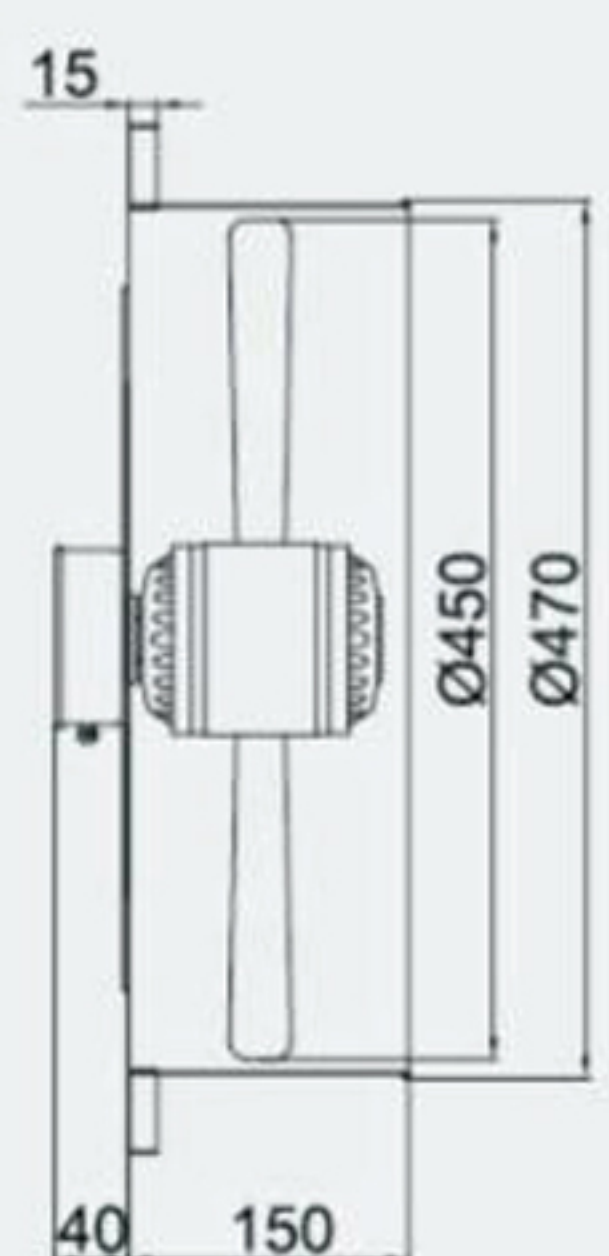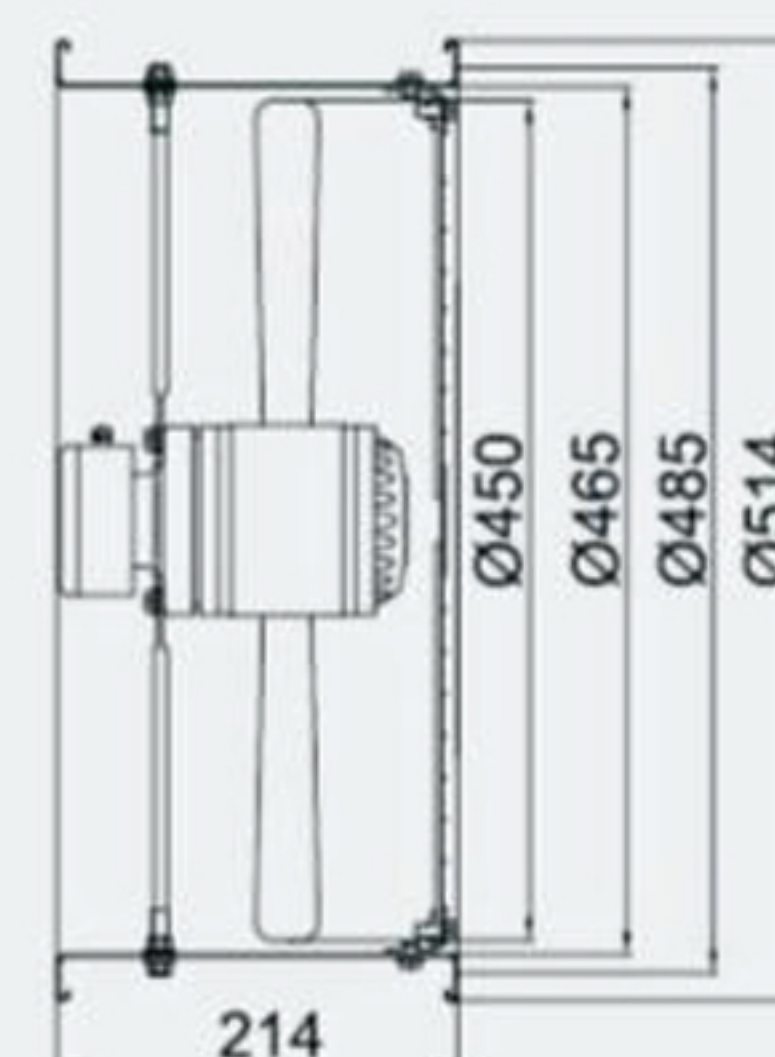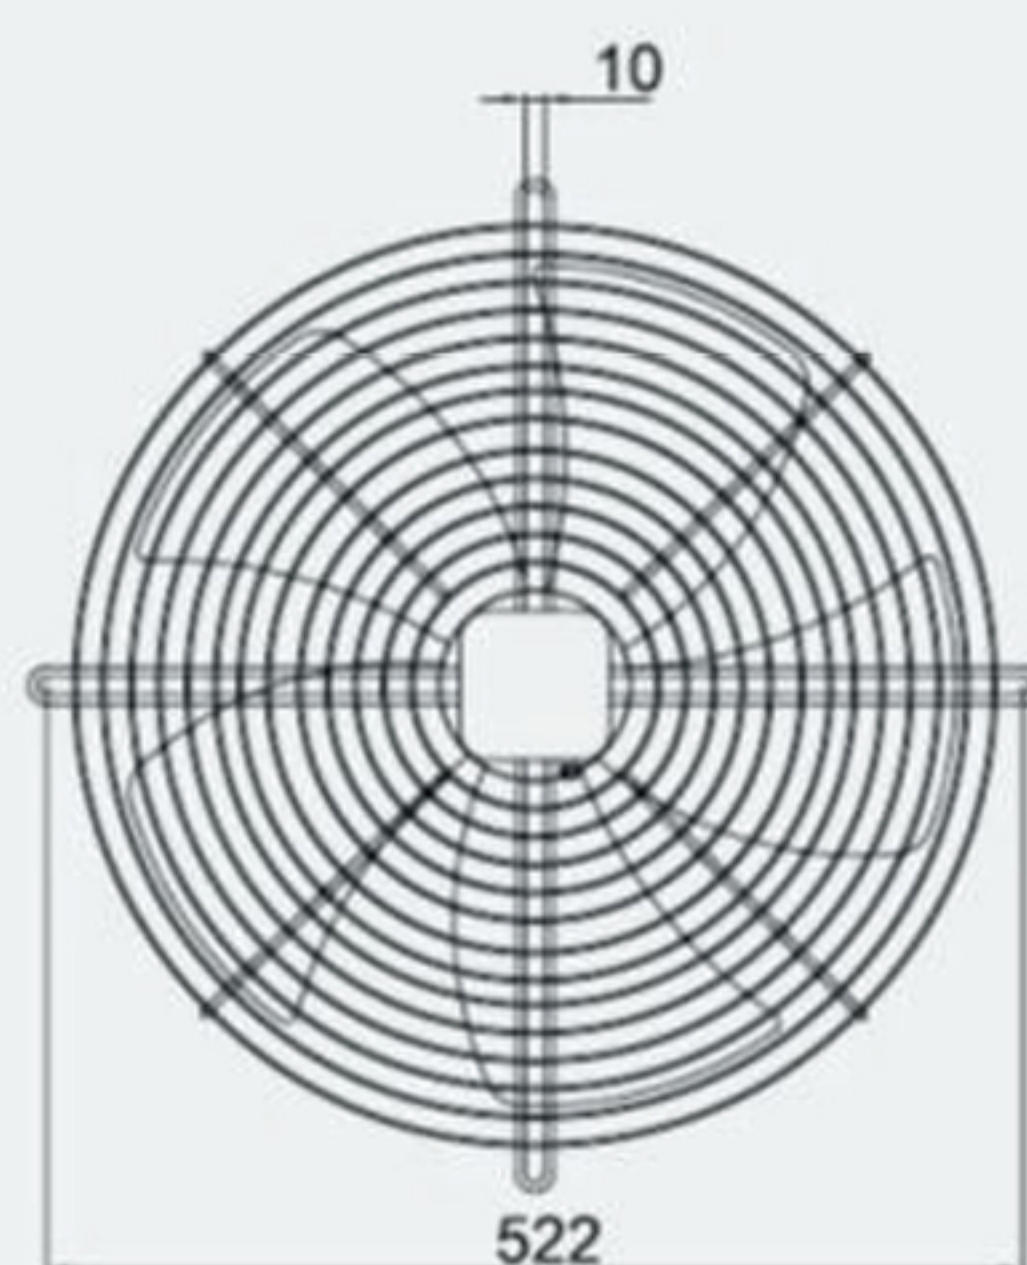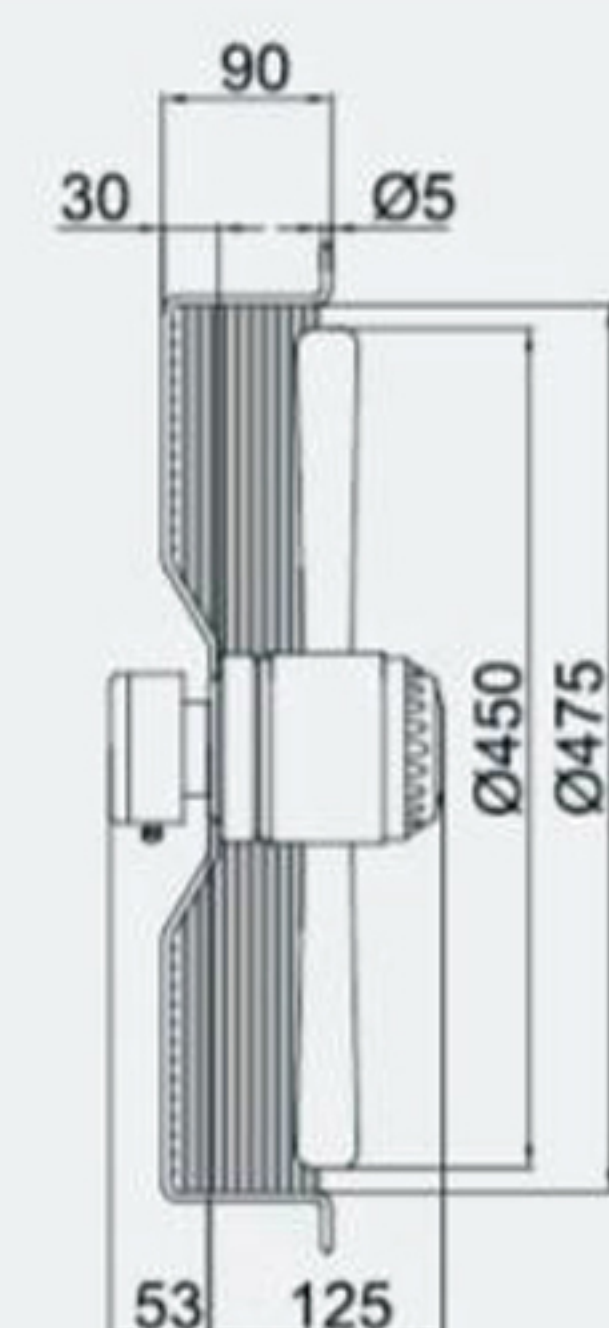

主要参数 The main parameters

型号 MODEL	额定电压 VOLTAGE (V)	频率 FREQUENCY (HZ)	额定电流 CURRENT (A)	输入功率 INPUT (W)	额定转速 SPEED (r/min)	最大风量 AIR FLOW (m³/h)	许用静压 MAX. STATIC PRESSURE (pa)	电容 CAPACITANCE (uf)	噪声 NOISE (dBA)	净重 NET WEIGHT (kg)	NO. ON THE CURVE
K-AC450-220-13	220	50	0.98	230	1380	5350	100	8	68	7.0	①
K-AC450-380-13	380	50	0.55	260	1390	5420	100	/	69	7.0	②
K-AC450-220-09	220	50	0.75	138	920	3785	80	6	55	7.0	③
K-AC450-380-09	380	50	0.42	150	960	4215	85	/	57	7.0	④

注：以上参数如有更改，恕不另行通知。 Note: We will not inform you if we change the data in the form.