

The Krube logo is located in the top left corner, enclosed in a white circle with a blue border. The word "Krube" is written in a bold, black, sans-serif font, with a small orange and blue graphic element to the right of the letter 'e'.

Krube

SPECIFICATION

MODEL
K-EC190-R230-38

Ø190mm BACKWARD CURVED




Features

- Speed Control: 0~10V DC /PWM
- Direction of rotation: clockwise,seen on rotor
- Impeller material: PA6+GF
- Type of protecyion: IP55
- Insulation class: B
- Mode of operation: continuous operation(S1)
- Bearing: ball bearings
- Motor protection: self-resetting TOP wired internally

Technical data

Model	Nomina voltage [V]	Freguency [Hz]	Speed [RPM]	Power input max[W]	Current max [A]	Sound pres level [dB(A)]	perm.amb. emp. [°C]	Electrical connection
K-EC190-R230-38	230	50/60	2940	64	0.53	65	-25...(+60)	E0

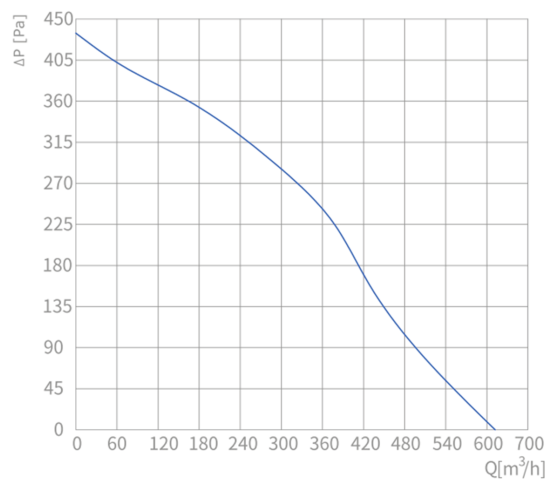

Overall Dimmensions

