

The logo for Krube, featuring the word "Krube" in a bold, black, sans-serif font. The letter "K" is stylized with a blue and orange gradient. The logo is enclosed in a white circle with a blue border, which is part of a larger blue and white graphic design on the left side of the page.



Krube

SPECIFICATION

**MODEL
K-EC133-R230-44**

Specification

1	Rated Voltage		230 (VAC)
2	Voltage Range		230+10% (VAC)
3	speed	Inblowing condition	4400+5% (r/min)
4	power		40+15% (W)
5	Tach Pulse Output		2 pulse/rev
6	Rotation		CW(see from rotor)
7	Insulation class		Class B
8	Duty cycle		Continuous
9	Ambient temp		-25°C ~ +60°C
10	Protected Class		IP55
11	Dynamic balance		G6.3
12	Electronic Protected		Yes
13	EMC	Emission	EN55014-1
		Immunity	EN55014-2
		Harmonics	EN61000-3-2/3

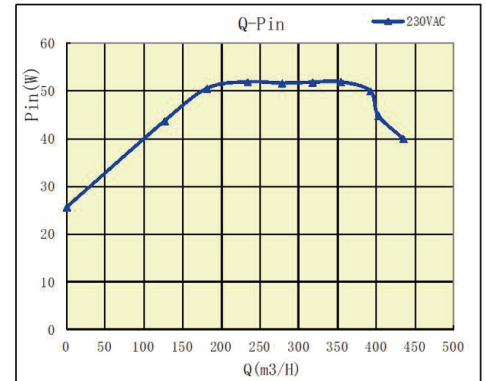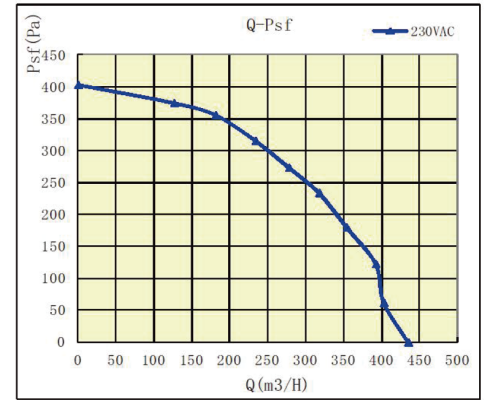

AC Power Cable

NO	Colour	Definition	Guage
1	Brown	L	UL2464 20AW
2	Blue	N	
3	Yellow Green	PE	

Control Cable

NO	Colour	Function	Guage
1	Red	+10Vdc output	UL2464 22AWG
2	Blue	GND	
3	Yellow	0~10Vdc/PWM	
4	White	FG	

