

The logo for Krube, featuring the word "krube" in a bold, lowercase, sans-serif font. The letter "k" is black with a small orange dot above it. The letter "e" is black with a small orange dot above it. The logo is enclosed in a white circle with a blue border.

krube

SPECIFICATION

MODEL
K-EC350-S230-21


1. Technical Parameter



Material: PA66
 Type of protection: IP44
 Insulation class: B

Type	K-EC350-S230-21
Curve	①
Nominal Voltage[VAC]	220
Frequency[Hz]	50/60
Speed[RPM]	1800
Power input[W]	175
Current draw[A]	1.2
Sound pressure level[dB]	65
Perm.amb.temp.[°C]	-25~+60


2. Curves

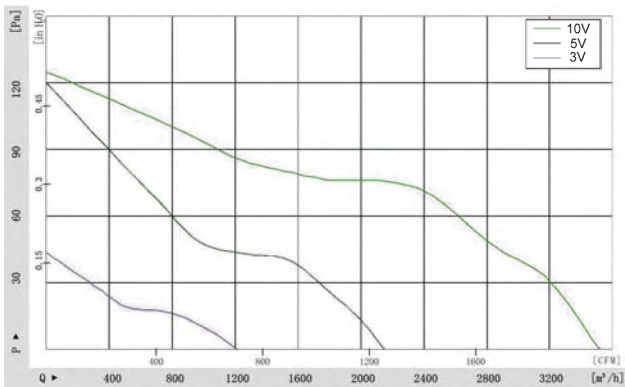

Signal	Color	Spec
L	Brown	AC220V 50/60Hz
N	Blue	AC220V 50/60Hz
PE	Yellow	Earth
	Green	

Signal	Color	Spec
Vsp	Red	DC10V Output
Vsp	Yellow	0-10VDC PWM
GND	Blue	GND
FG	White	1Pulse/R

2. Dimensions

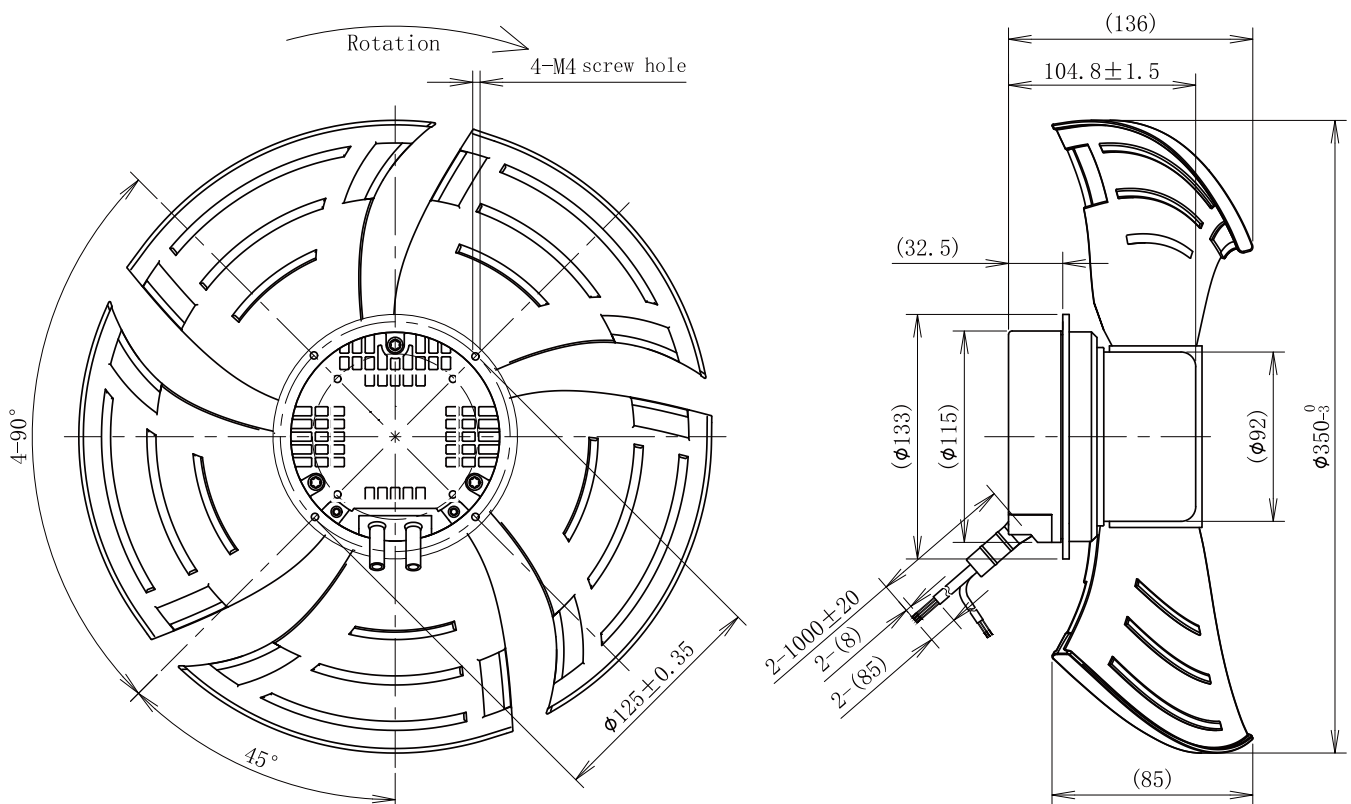

3.Dimensions(With wall concave net cover grill)

