

The logo for Krube, featuring the word "krube" in a bold, lowercase, sans-serif font. The letter "k" is black with a small orange dot above it. The letter "e" is black with a small blue dot above it. The logo is enclosed in a white circle with a blue border.


krube

SPECIFICATION

MODEL
K-AC250-D-Series

Technical data

- Type of Protection:IP54
- Insulation Class: "B" "F"
- Mode of operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp: 40~+60°C

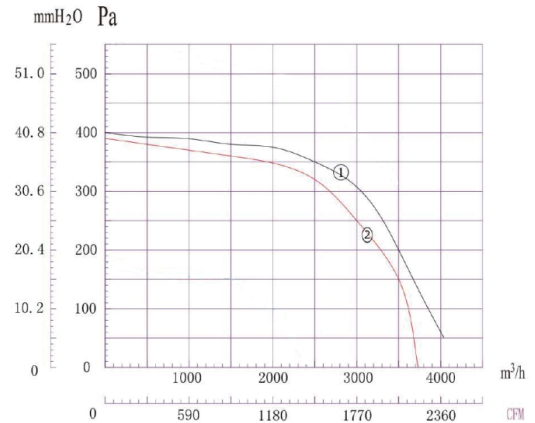

Model	Voltage [V]	Frequency [Hz]	Current [A]	Power [W]	Speed [RPM]	Air flow [m ³ /h]	Noise Level [dB(A)]	Capacitor [μF]	Curve
K-AC250-D220-13	220	50HZ	4.00A	850W	1380	3730	75	25	②
K-AC250-D380-12	380	50HZ	2.10A	1200W	1250	4040	77	/	①

Outline Drawing

