

The Krube logo is located in the top left corner, enclosed in a white circle with a blue border. The logo itself consists of the word "krube" in a bold, lowercase, sans-serif font, with a small orange and blue graphic element to the right of the 'e'.

**krube**

# SPECIFICATION

---

**MODEL**  
**K-AC28080-Series**


## 1.General Specifications



- Size:280mm×280mm×80mm
- Weight:2803g
- Noise:69-70dBA
- Airflow:1865-1970m<sup>3</sup>/hr 1098-1160CFM
- Lead Wire: Teflon 22#
- Operating Temperature:-10°C~+105°C
- Motor: Capacitor-Run And External Rotor Induction Motor
- Frame:Aluminum Alloy
- Terminals:0.5mm
- Impeller Material:Metal

Model	Bearing System	Voltage [VAC]	Freq. [Hz]	Current [A]	Power [W]	Speed [RPM]	Noise [dB(A)]	Air Flow		Phase	Capacitor
								M <sup>3</sup> /hr	CFM		
K-AC28080-A100-25	Ball	100/125	50/60	1.2/1.3	126/148	2500/2700	69/70	1865/1970	1098/1160	1	2*8uf/250v
K-AC28080-A200-25		200/240	50/60	0.58/0.63	126/148	2500/2700	69/70	1865/1970	1098/1160	1	4uf/630v

## 2.Air volume curve

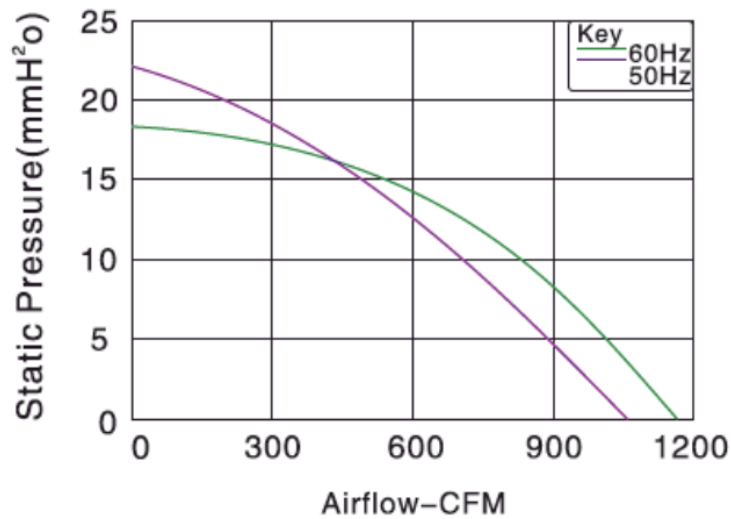

## 3.Outline drawing

