

The logo for Krube, featuring the word "krube" in a bold, lowercase, sans-serif font. The letter "k" is black with a small orange dot above it. The letter "e" is black with a small orange dot above it. The logo is enclosed in a white circle with a blue border.

krube


SPECIFICATION

MODEL
K-AC12038-A220-23

1. Technical Data

NO	TEST ITEM	SPECIFICATION/CONDITION	
1	MODEL	K-AC12038-A220-23	
2	DIMENSION	120×120×38mm	
3	RATED VOLTAGE	220 VAC	
4	OPERATING VOLTAGE RANGE	220 VAC ~ 240 VAC	
5	START-UP VOLTAGE	175VAC	
6	RATED CURRENT (A)	50Hz	0.14A
		60Hz	0.12A
7	RATED INPUT POWER (W)	50Hz	22W
		60Hz	21W
8	AIR FLOW (CFM)	50Hz	95CFM
		60Hz	115CFM
9	AIR PRESSURE (mmH2O)	50Hz	8.38(mmH2O)
		60Hz	9.65(mmH2O)
10	ROTATIONAL SPEED (R.P.M.)	50Hz	2700±10% (R.P.M.)
		60Hz	3100±10% (R.P.M.)
11	ACOUSTICAL NOISE (dB-A)	50Hz	42dB-A
		60Hz	47dB-A
12	INSULATION RESISTANCE	500VDC 100MΩ	
13	INSULATION & VOLTAGE RESISTANCE	1800VAC(50Hz) 0.5mA 1S	
14	LIFE EXPECTANCE	50,000 HRS AT TEMP. 25°C , 15%~65RH	
15	OPERATING TEMPERATURE	-25°C ~ +75°C	
16	STORAGE TEMPERATURE	-35°C ~ +80°C	
17	WEIGHT	455g	
18	MOTOR PROTECTION	IMPEDANCE PROTECTION	
19	INSULATION TYPE	CLASS B	
20	BEARING SYSTEM	Ball bearing B	
21	FRAME	AL(ADC12)	
22	STATOR&ROTOR	Sinosteel	
23	FAN BLADE	PBT	

2.Air Volume Curve

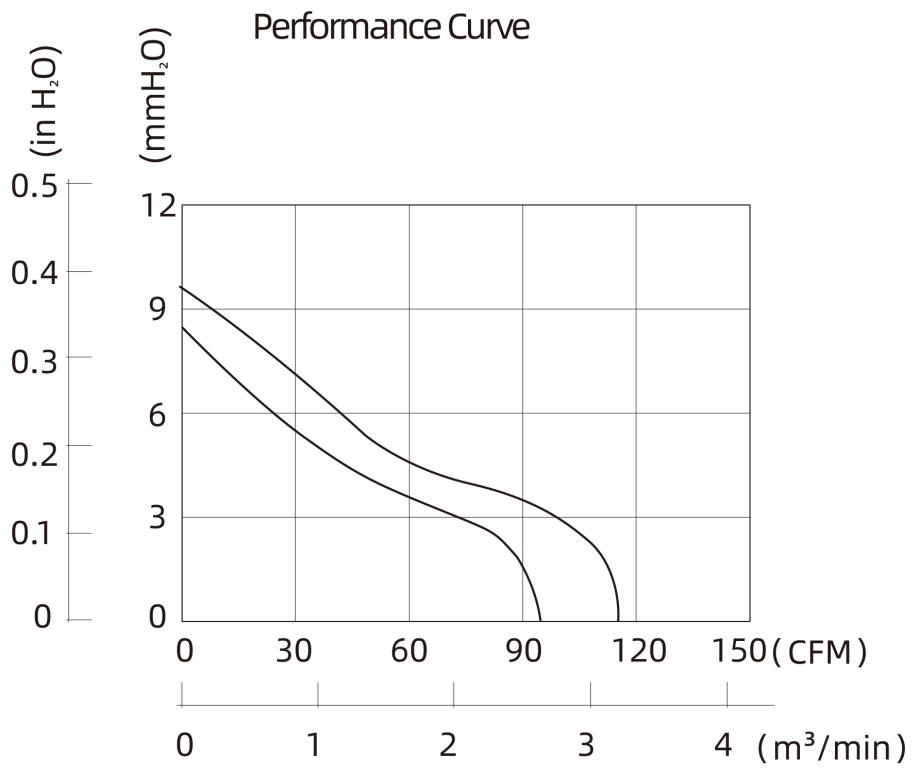

3.Outline Drawing

