

The Krube logo is located in the top left corner, enclosed in a white circle with a blue border. The logo itself consists of the word "krube" in a bold, lowercase, sans-serif font, with a small orange and blue graphic element to the right of the 'e'.

krube

SPECIFICATION

MODEL
K-AC300-S230-25

1.Purpose

This specification provides part specific requirements and the Engineering Standard and/or Engineering requirements.

2.Engineering standard and safety regulations

2.1 Engineering standard

GB/T12350 Safety requirements of small-power motors

2.1.2

JB/T 10563 Technical specification for general purposes centrifugal fans

2.1.3 EN 60335-1 Safety of household and similar electrical appliances

2.2 Certification

CE-EMC TUV CCC Others

2.3 All material accord with RoHS.

3.Operating environment requirements

3.1 Operating temperature and humidity

Operating temperatures from -40°C to $+65^{\circ}\text{C}$, Operating humidity from 5% to 85% RH.


3.2 Weight: about 3.1kg/pcs

4.Protection

This motor with heat protection, cut off temperature: 140°C - 150°C , replacement temperature: 80°C - 110°C .


5.Mechanical requirements

5.1 Dimension drawing

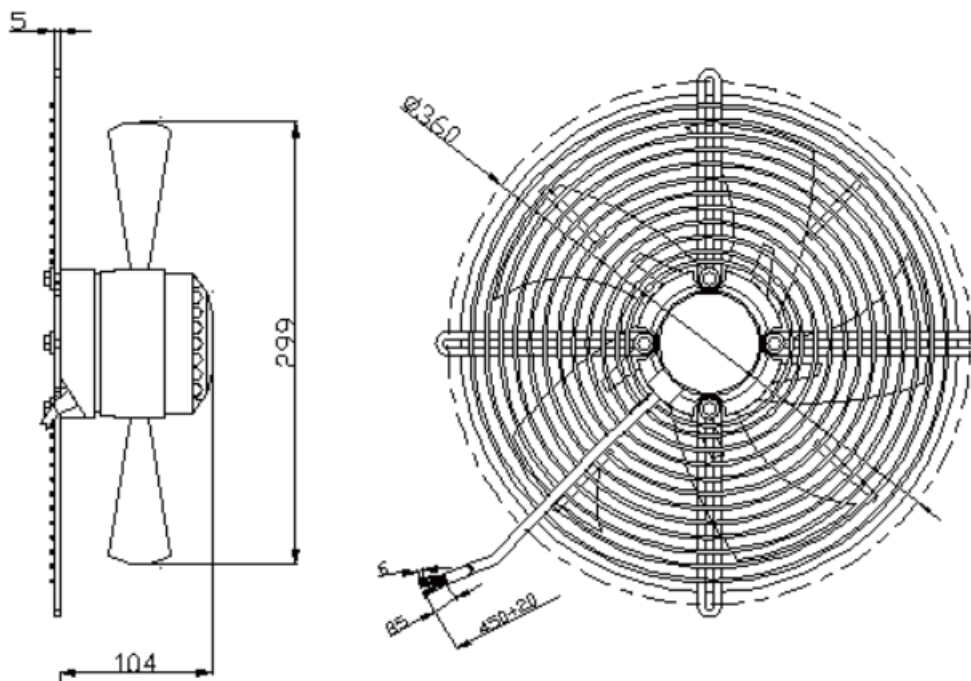

5.2 View lead connection

5.2 View lead connection

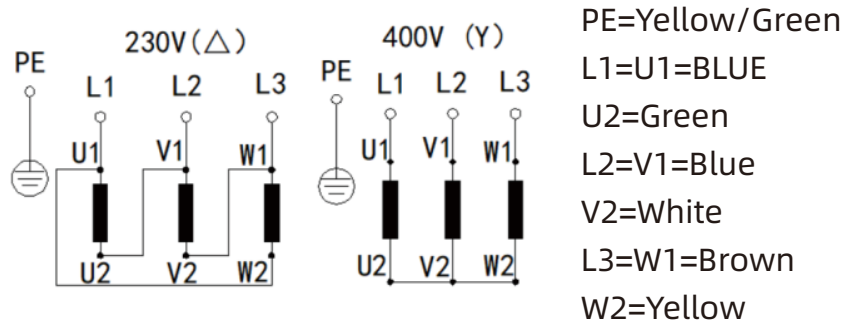

6.3 Balan cing

When the fan is running at $1600 \pm 10\%$ r/min, the dynamic balance accuracy of each end side is not lower than the balance quality grade G6.3.

6.4 Motor type of protection

Ingress protection class is IP44.

6.5 Life expe ctance

The life expectancy is 40,000 hours at rated voltage, ambient temperature of 40 °C, and continuous operation of the fan at full speed (According to the actual working conditions of the product, the life expectancy will be different) .The warranty period is subject to the agreement agreed by both parties.

6.Fan performance

6.1Rating data

6.1.1Performance parameters of voltage 400VAC and frequency 50/60Hz

Voltage [VAC]	Frequency [Hz]	Current draw [A] ($\pm 10\%$)	Power input [W] ($\pm 10\%$)	Speed [r/min] ($\pm 10\%$)	(OPa) Airflow [m^3/h] ($\pm 10\%$)	Noise [Lp:dB(A)] (-7/+3)	Insulation class
400	50	0.36	210	2530	3130	75	F
400	60	0.47	300	2690	3345	78	F

6.1.2 Performance parameters of voltage 230VAC and frequency 50/60Hz


Voltage [VAC]	Frequency [Hz]	Current draw [A] ($\pm 10\%$)	Power input [W] ($\pm 10\%$)	Speed [r/min] ($\pm 10\%$)	(OPa) Airflow [m^3/h] ($\pm 10\%$)	Noise [Lp:dB(A)] (-7/+3)	Insulation class
230	50	0.61	210	2530	3130	75	F
230	60	0.84	300	2690	3345	78	F

Note: the nominal parameter is under the following situation in Fans-tech lab:Fan runs in open operation. The airflow is measured in the wind tunnel, the noise is tested in a horizontal-position in the noise test room, with 1m distance to the air inlet of the fan.

This product is designed to operate at voltages from 230VAC~400VAC and frequencies from 50Hz ~60Hz.


6.2 Performan ce curve

6.2.1 Performance curve at voltage 400VAC frequency 50Hz

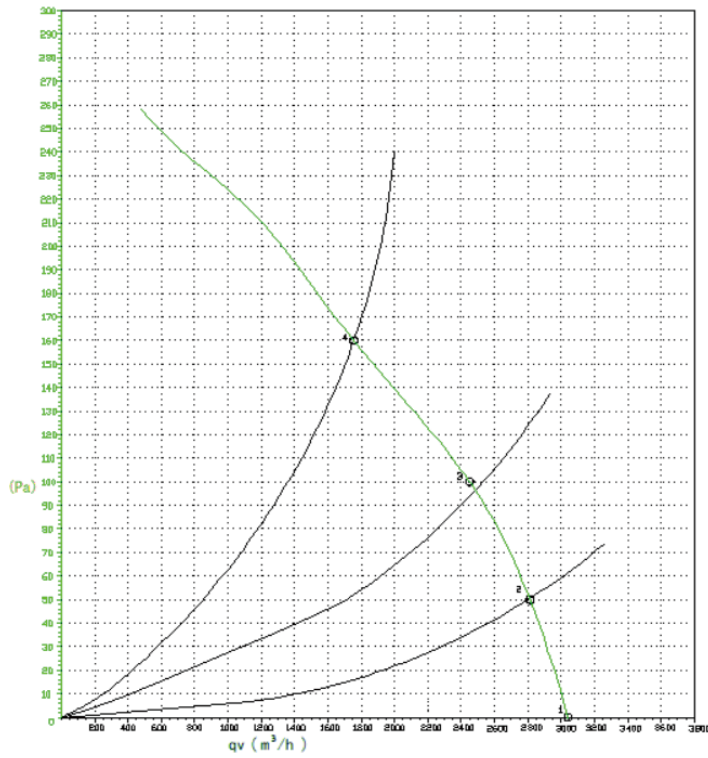

	U	F	N	Pe	I	qv	Pfs
	V	Hz	r/min	W	A	M³/s	Pa
1	400	50	2530	210	0.36	3130	0
2	400	50	2495	226	0.37	2815	50
3	400	50	2450	245	0.39	2455	100
4	400	50	2360	276	0.43	1755	160

6.2.2 Performance curve at voltage 400VAC frequency 60Hz

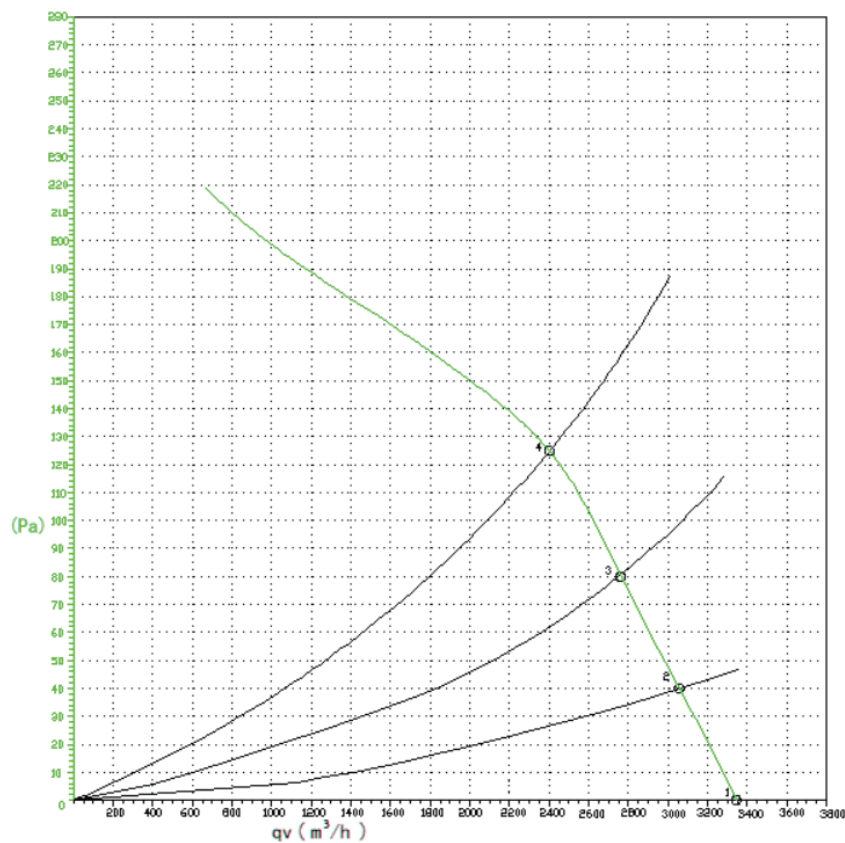

	U	F	N	Pe	I	qv	Pfs
	V	Hz	r/min	W	A	M ³ /s	Pa
1	400	60	2690	300	0.47	3340	0
2	400	60	2630	315	0.48	3060	40
3	400	60	2575	330	0.50	2760	80
4	400	60	2500	346	0.52	2400	125

7.Packaging and marks

7.1 Packaging

The package must have a defined size and a suitable structure to ensure that the fan will not be damaged.