

The logo for Krube, featuring the word "krube" in a bold, lowercase, sans-serif font. The letter "k" is black with a small orange dot above it. The letter "e" is black with a small orange dot above it. The logo is enclosed in a white circle with a blue border.

**krube**

# SPECIFICATION

---

**MODEL**  
**K-AC17255-A220-28**

## 1、 Technical data



Size: 172mm×150mm×55mm

Airflow: 250-293CFM

Weight: 1200g

Noise: 56-61dB (A)

Impeller Material: Metal

Frame: Aluminum Alloy

Terminals: 0.5mm


Lead Wire: Teflon 22#UL 1332 (Optional)

Motor: Capacitor-Run And External Rotor Induction Motor

Operating Temperature: -10°C~+65°C

Model	Bearing System	Voltage (VAC)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Noise (dB(A))	Air Flow (CFM)	Phase	Capacitor (μF/VAC)
K-AC17255-A220-28	Ball	200/240	50/60	$\frac{0.20}{0.22}$	46/50	$\frac{2850}{3300}$	56/61	250/293	1	1/500

## 2、 Product performance curve

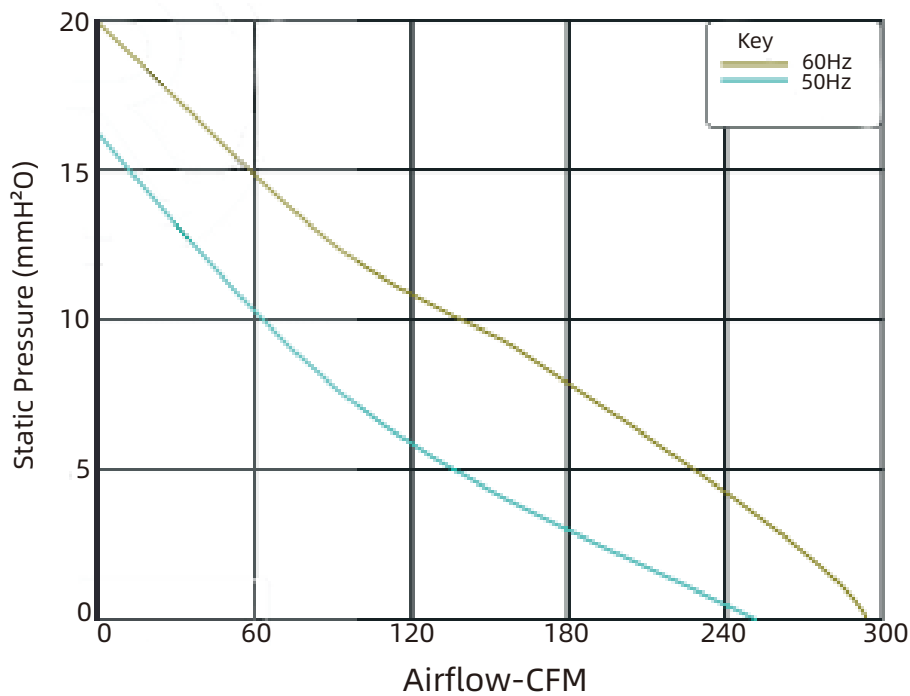

## 3.Product outline drawing

