

产 品 规 格 书

PRODUCT SPECIFICATION

客户名称/ Name of Customer	
客户料号/ Part No.	
客户承认签章/ Customer Approved Signatures	

供方/ Supplier	友容新源电气（昆山）有限公司 CFriend Electric(Kunshan)Co.,LTD	设计 /Designer	胡曾
文件编号/ Spec No.	CF-PS20201208001	审核 /Checked	Kevin
品名/ Description	Base	批准 /Approved	Bill
型号/ Model	SC101PV-B		
日期/ Date	09/05/2019		

地址：中国江苏省昆山市周市镇陆杨友谊北路153号

ADD: No.153, Youyi North Road, Zhoushi Town, Kunshan City,Jiangsu Province, China

电话/Tel: 86-512-36698841

传真/Fax: 86-512-36698843

网址/Web: www.cfriend-electric.com

SC101PV-B

GB/T13539.6/GB14048.3 standard

型号/ Product Model

SC101PV-B

技术数据/Technical Data

Rated Voltage:	1000Vdc
Rated Current:	32A
Maximum power consumption	3.5w

描述/ Description

- 安全可靠的螺栓连接方式

Safe and reliable connecting way of bolt-on

- 熔断器底座用于电力、冶金、石油、通讯、化工等行业中；结构紧凑、安装方便、耐振动和冲击强度高，优越的电气性能

Fuse base used in electric power, metallurgy, petroleum, communications, chemical and other industries; compact structure, easy installation, high vibration and impact resistance, superior electrical performance.

- 设计符合 IEC60269-6


Product design in accordance with IEC60269-1

- 产品符合RoHS

Product in accordance with RoHS



外形尺寸/ Dimensions

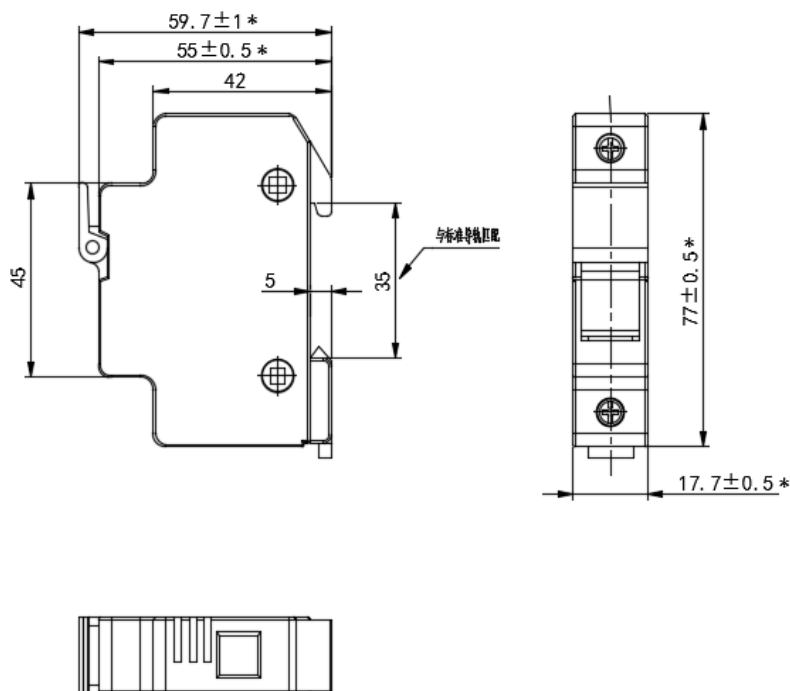

底座零件号/Base Part Numbers

Type/型号	Rated Voltage 电压	Current 电流	Unit Packing 包装	weight(kg/1) 重量
SC101PV-B	1000Vdc	32A	12	0.063

技术数据/Technical Data

Type/型号	SC101PV-B
Base material/底座材质	PBT+30%GF
Contacts/触头	Sn plated copper
Terminal Screw/螺钉	M5
Maximum Tightening Torque Terminal Screw/扭矩	2.0-2.5N·m
Flame retardant grade/阻燃等级	UL94-V0
Protection level/防护等级	IP20
Storage Temperature/储存温度	-25℃ to 40℃