










网罩 Grid (S)  
K-AC500-S220-\*\*

方形 Square (W)  
K-AC500-W220-\*\*

圆筒 Cylinder (Y)  
K-AC500-Y220-\*\*

安装尺寸图 Mounting dimensions

曲线图 Graph

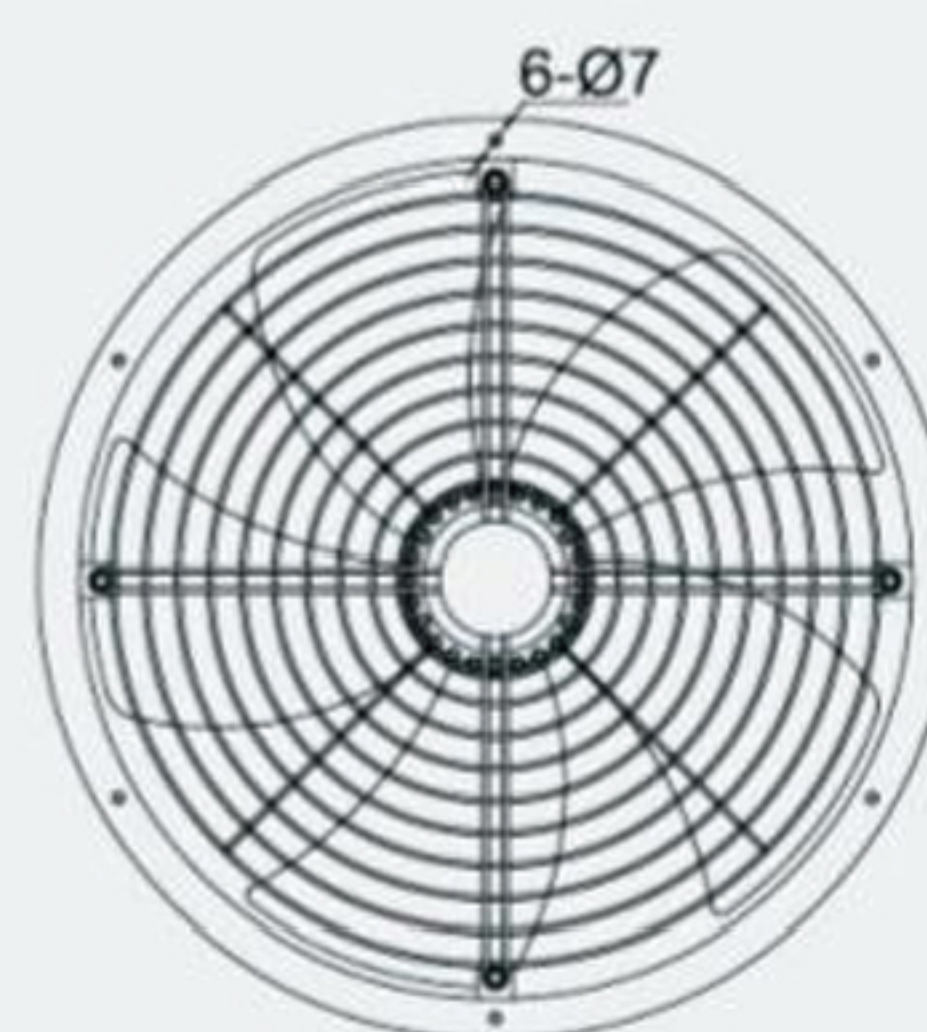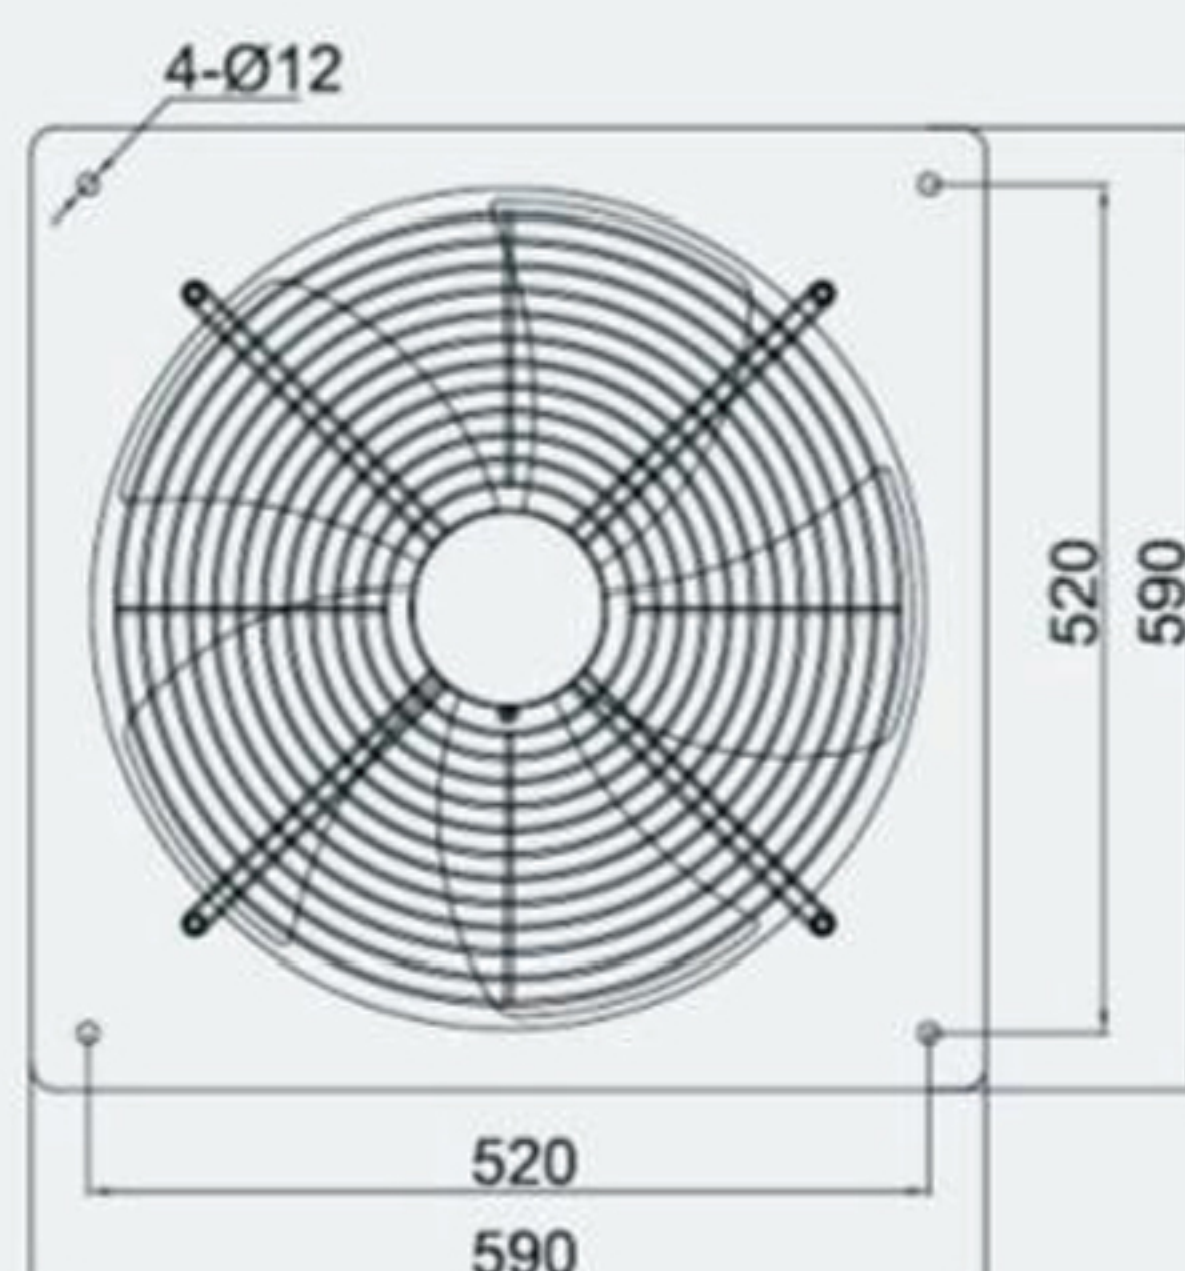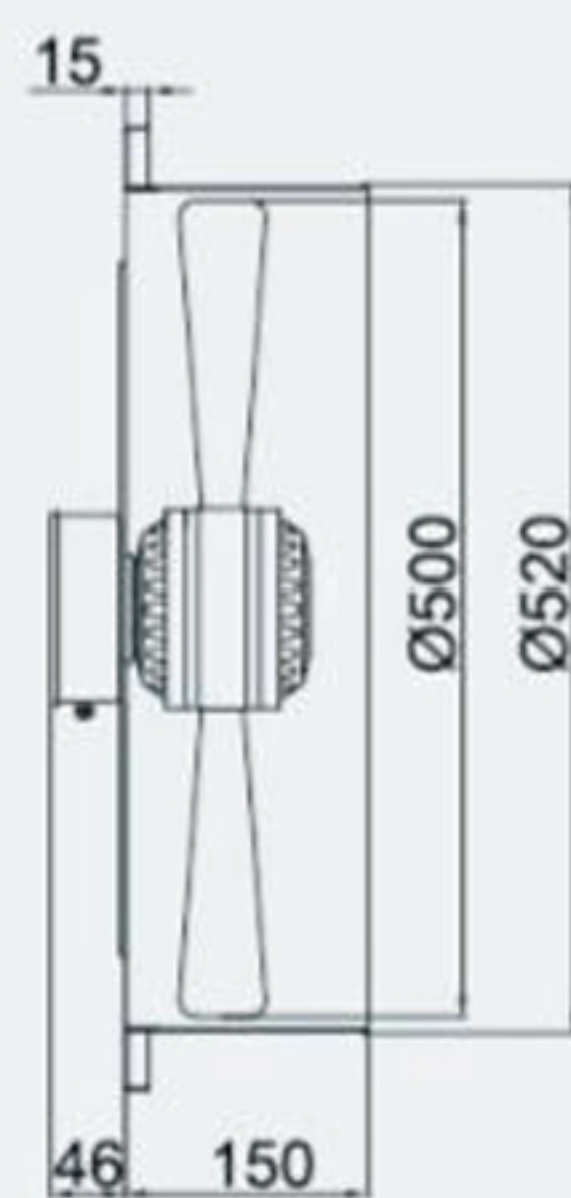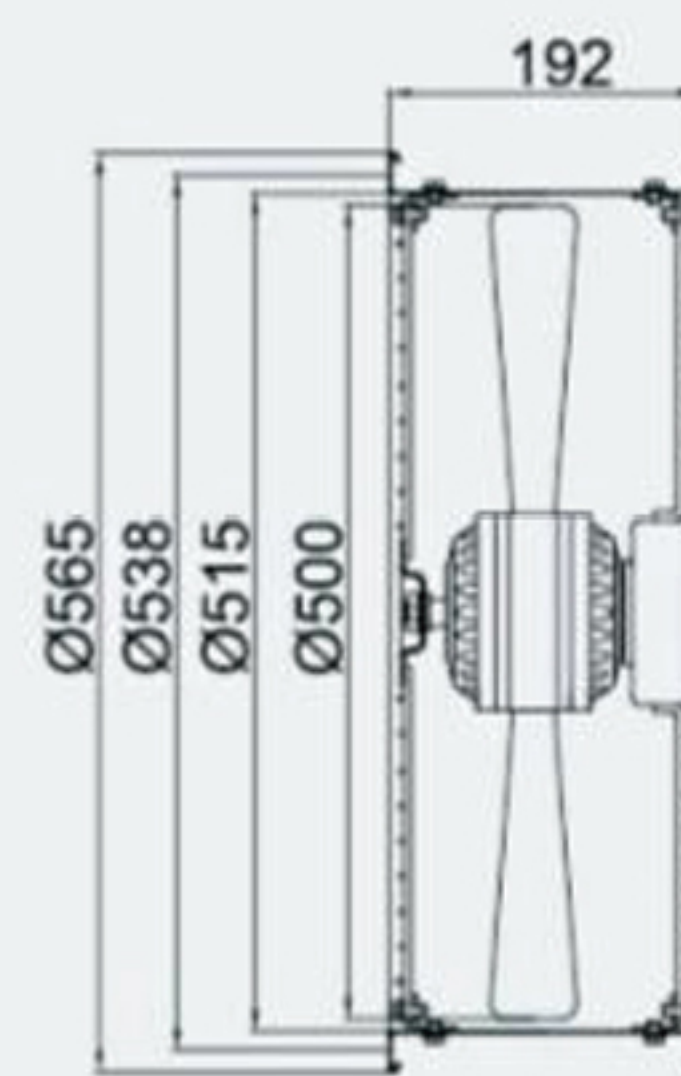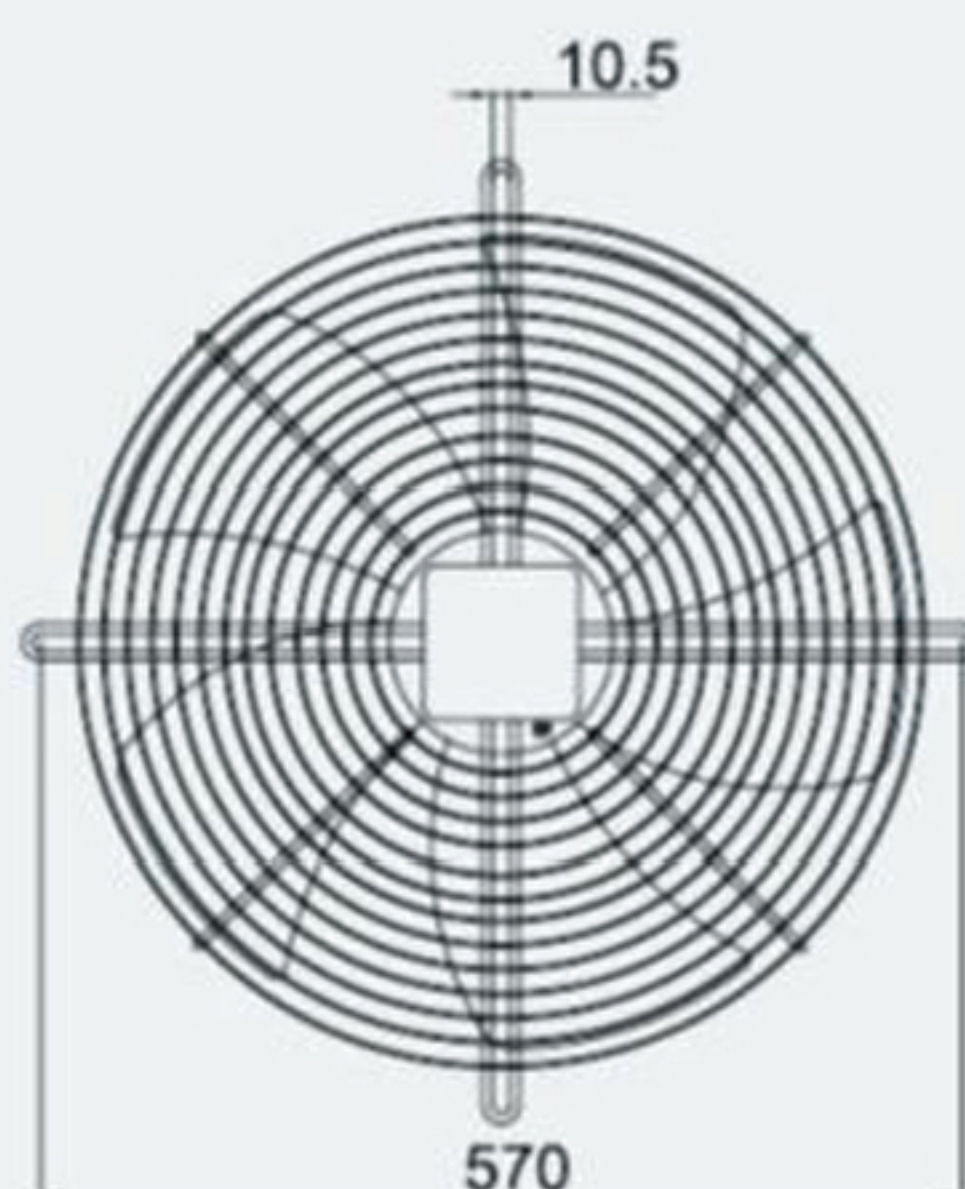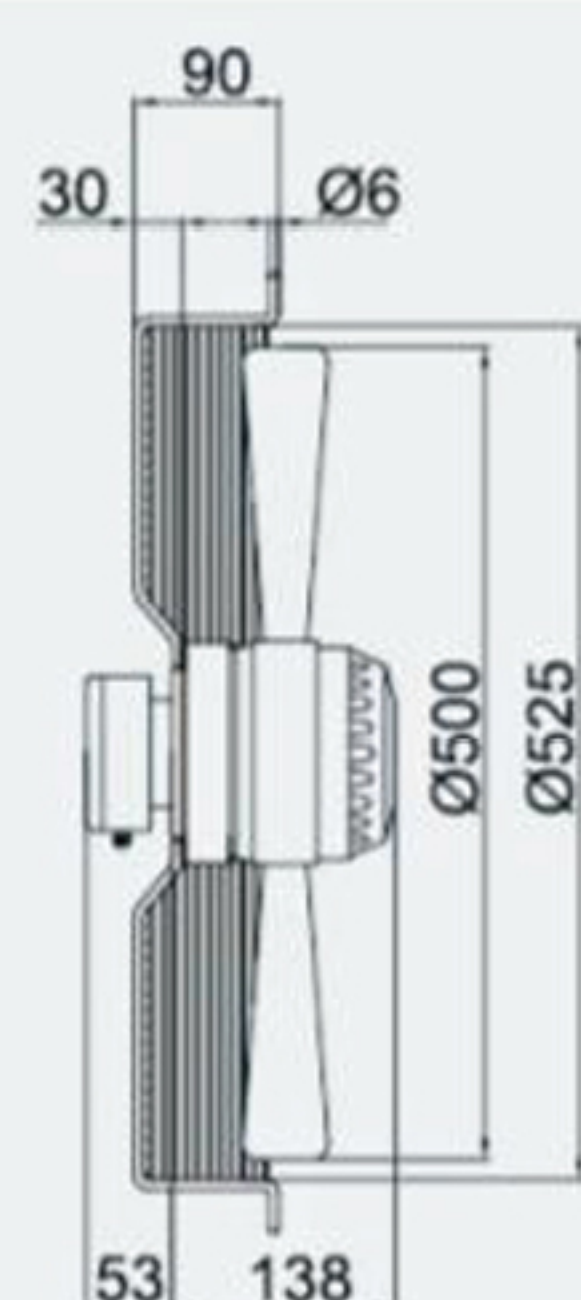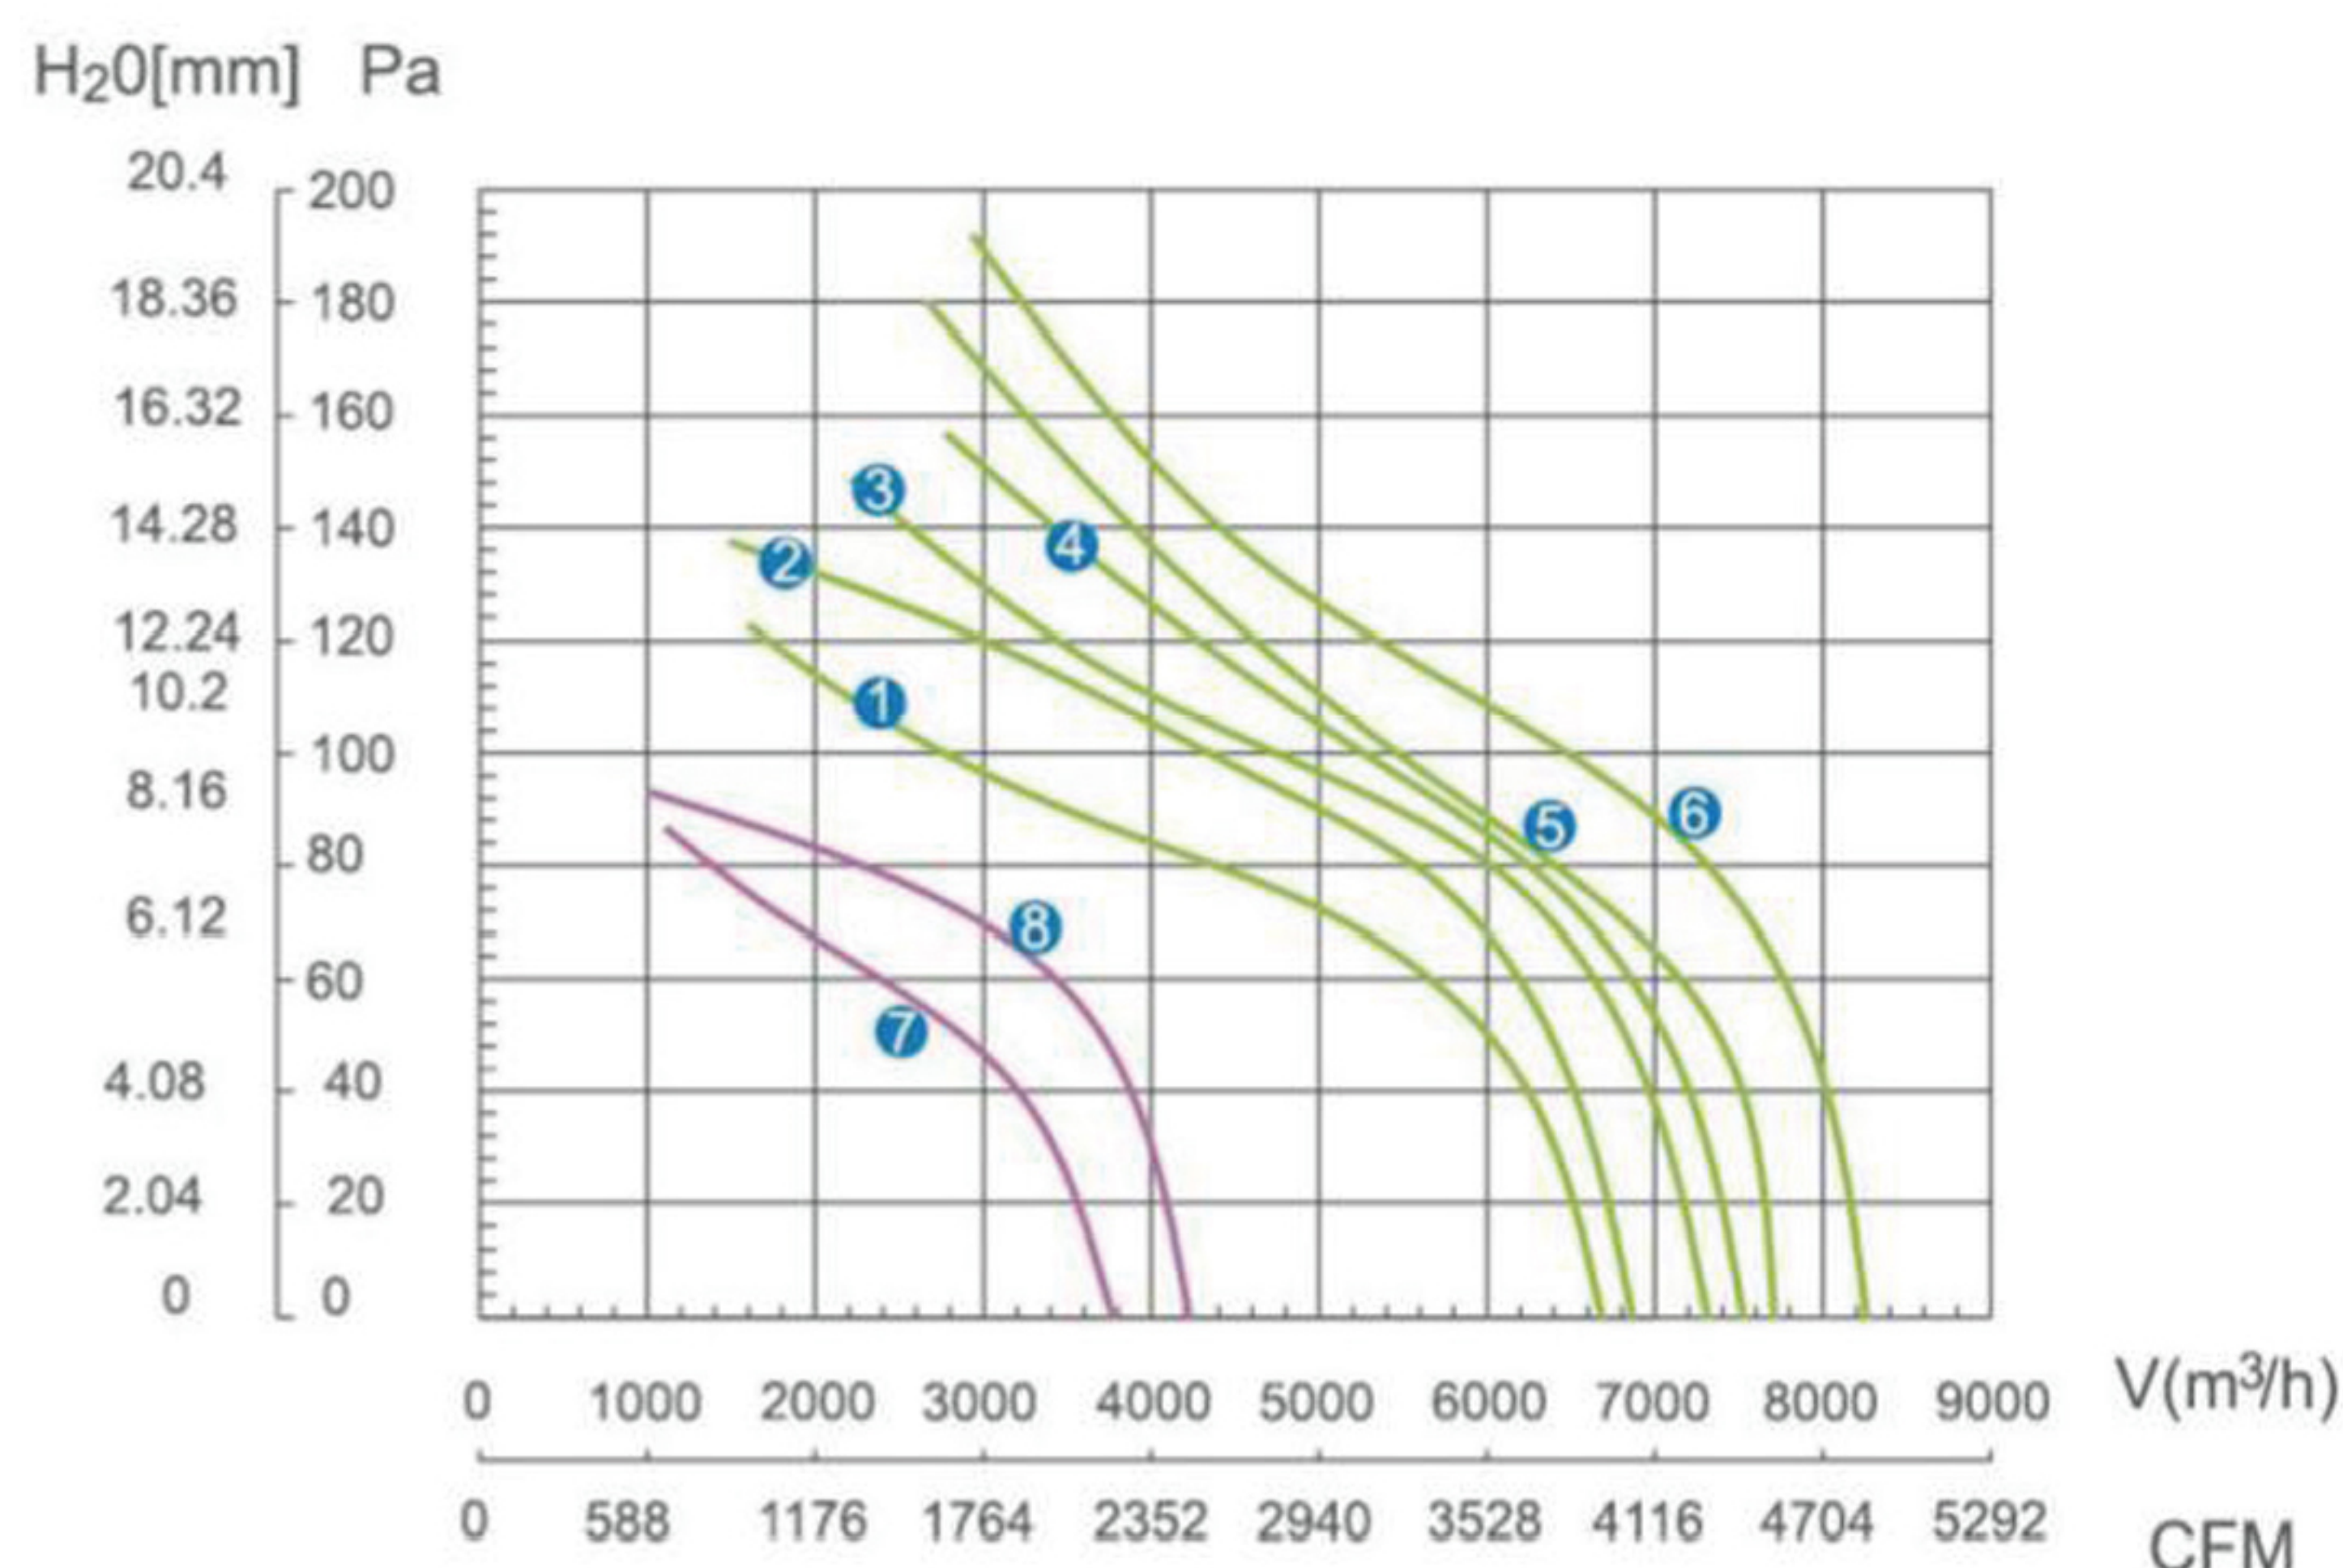

主要参数 The main parameters

| 型号<br>MODEL      | 额定电压<br>VOLTAGE (V) | 频率<br>FREQUENCY (HZ) | 额定电流<br>CURRENT (A) | 输入功率<br>INPUT (W) | 额定转速<br>SPEED (r/min) | 最大风量<br>AIR FLOW (m³/h) | 许用静压<br>MAX. STATIC PRESSURE (pa) | 电容<br>CAPACITANCE (uf) | 噪声<br>NOISE (dBA) | 净重<br>NET WEIGHT (kg) | NO. ON THE CURVE |
|------------------|---------------------|----------------------|---------------------|-------------------|-----------------------|-------------------------|-----------------------------------|------------------------|-------------------|-----------------------|------------------|
| K-AC500-220-13   | 220                 | 50                   | 1.6                 | 350               | 1380                  | 6325                    | 115                               | 8                      | 69                | 8.5                   | ①                |
| K-AC500-380-13-6 | 380                 | 50                   | 0.88                | 350               | 1390                  | 6350                    | 115                               | /                      | 70                | 8.5                   | ②                |
| K-AC500-380-15-7 | 380                 | 60                   | 0.8                 | 450               | 1550                  | 7155                    | 120                               | /                      | 72                | 8.5                   | ③                |
| K-AC500-220-13   | 220                 | 50                   | 2.1                 | 450               | 1380                  | 7250                    | 125                               | 12                     | 70                | 9.0                   | ④                |
| K-AC500-380-13   | 380                 | 50                   | 1.1                 | 450               | 1390                  | 7328                    | 125                               | /                      | 71                | 9.0                   | ⑤                |
| K-AC500-380-15   | 380                 | 60                   | 1.0                 | 550               | 1550                  | 8125                    | 135                               | /                      | 75                | 9.0                   | ⑥                |
| K-AC500-220-09   | 220                 | 50                   | 1.05                | 230               | 900                   | 5700                    | 80                                | 10                     | 58                | 9.0                   | ⑦                |
| K-AC500-380-09   | 380                 | 50                   | 0.9                 | 210               | 960                   | 5850                    | 85                                | /                      | 59                | 9.0                   | ⑧                |

注：以上参数如有更改，恕不另行通知。 Note: We will not inform you if we change the data in the form.