


PEF/PMF 660Vdc 6-400A / GEF 800Vdc 12-100A


【SELECTION TABLE】

Spec.	Amp	Model	Ordering No.	Pre-arcing I _{pt} (A ² S)	Total I ² t (A ² S)	Power loss (W)	Spec.	Amp	Model	Ordering No.	Pre-arcing I _{pt} (A ² S)	Total I ² t (A ² S)	Power loss (W)
PEF	6	PEF6 EV	RN502095	2	8	2	PMF	125	PMF125 EV	RN302413	750	2800	21
	10	PEF10 EV	RN502105	6	15	2.5		160	PMF160 EV	RN302414	900	4500	22.5
	12	PEF12 EV	RN502115	12	24	3		180	PMF180 EV	RN302415	1300	7500	24
	16	PEF16 EV	RN502125	17	38	5		200	PMF200 EV	RN302425	2000	12000	33
	20	PEF20 EV	RN502135	20	53	5		225	PMF225 EV	RN302435	3000	18600	36
	25	PEF25 EV	RN502145	23	75	5.5		250	PMF250 EV	RN302445	4900	21000	39
	32	PEF32 EV	RN502155	28	98	6.8		280	PMF280 EV	RN302455	6500	32000	43
	35	PEF35 EV	RN502225	33	150	7		315	PMF315 EV	RN302465	8900	45000	46
	40	PEF40 EV	RN502235	50	200	8		350	PMF350 EV	RN302475	13500	70000	50
	45	PEF45 EV	RN502245	80	350	9		400	PMF400 EV	RN302476	14000	75000	53
	50	PEF50 EV	RN502255	100	500	11							
	63	PEF63 EV	RN502265	120	650	12.5							
	71	PEF71 EV	RN502275	190	900	14							
	80	PEF80 EV	RN502285	230	1300	16							
	90	PEF90 EV	RN502295	350	1900	17.6							
	100	PEF100 EV	RN502305	500	2300	19							
GEF	12	GEF12-EV	RN528250	12	30	4.2	GEF	45	GEF45-EV	RN528320	90	540	10.5
	16	GEF16-EV	RN528260	17	54	4.5		50	GEF50-EV	RN528330	110	660	13
	20	GEF20-EV	RN528270	20	80	5.1		63	GEF63-EV	RN528340	130	780	14.5
	25	GEF25-EV	RN528280	23	105	5.6		71	GEF71-EV	RN528350	220	1320	16
	32	GEF32-EV	RN528290	30	120	6.7		80	GEF80-EV	RN528360	290	1760	20
	35	GEF35-EV	RN528300	36	180	7.8		100	GEF100-EV	RN528365	630	3750	25
	40	GEF40-EV	RN528310	55	330	9.5							
Matched Bases			SEP-200	Page32			Matched Bases			SEP-200	Page32		


【DIMENSIONS】

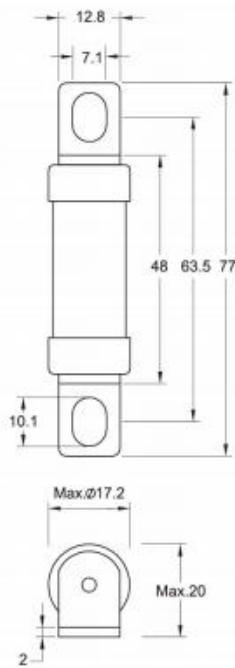

【PEF】 Unit: mm

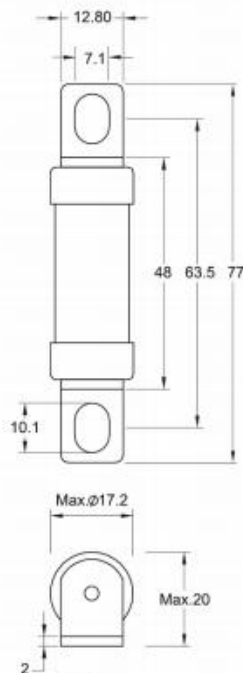

【GEF】 Unit: mm

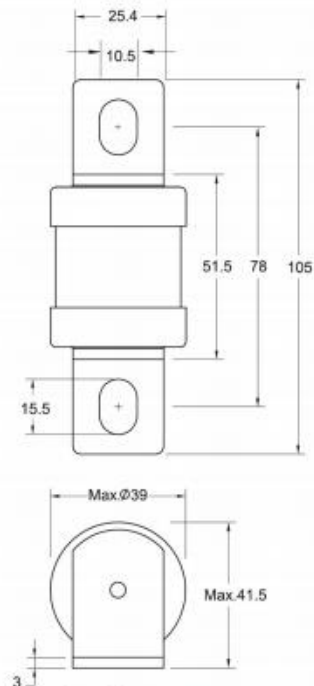

【PMF】 Unit: mm



ADD: NO.153,Youyi North Rd,
Kunshan City,China



Tel: +86-512-36698841/42
Fax: +86-512-36698843



Web: www.cfriend-electric.com
E-mail: sales@cfriend-electric.com